


# 100BZ43.7 (100-3,7-UB5)

## Submersible sewage pump 4"



Curve Q-H

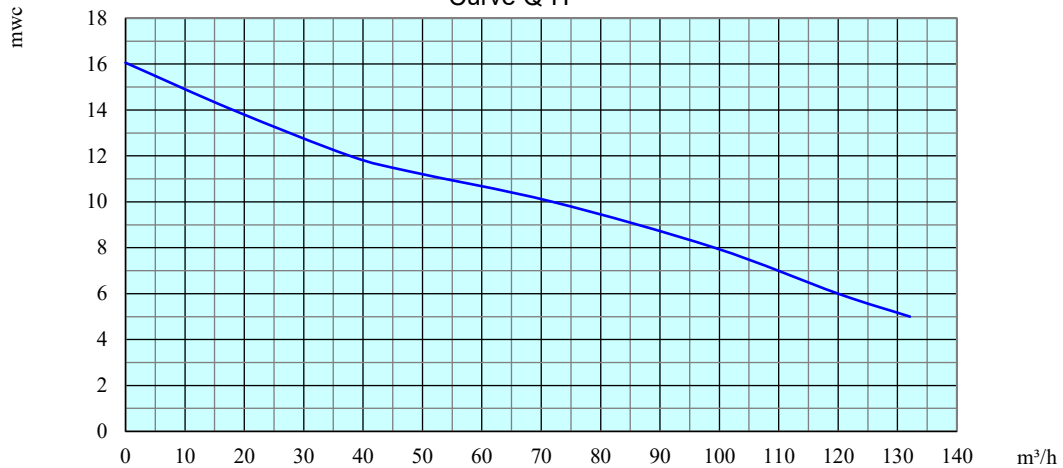

Type	: Tsurumi, 100BZ43.7
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,8 kW at 1.450 rpm
Nominal current	: 7,9 A
Free impeller passage	: 80 mm
Weight	: 98 kg ( without cable )
Height	: 681 mm
Diameter	: Ø 584 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: large free impeller passage closed single-channel impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p