


## 100C42.2 (22-CE2) Submersible cutter pump 4"

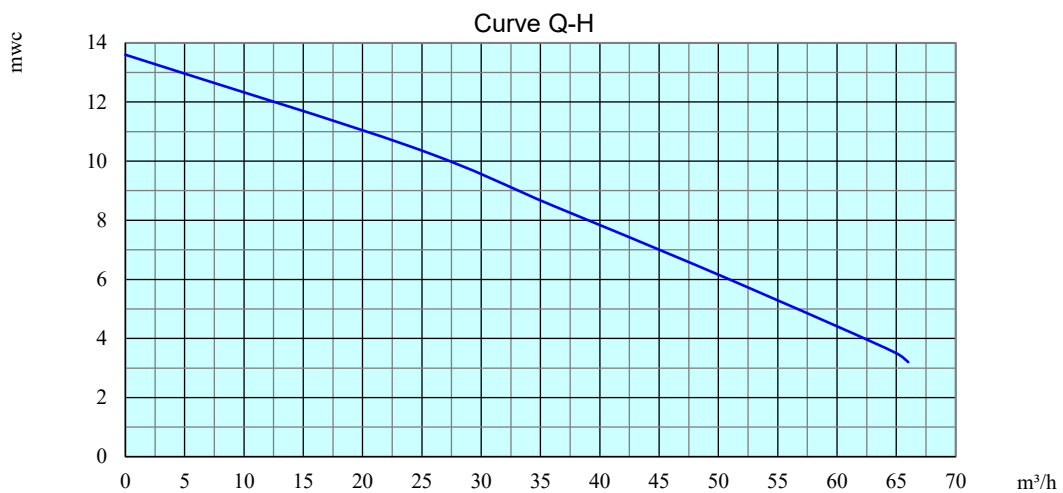

|                       |   |
|-----------------------|---|
| Type                  | : Tsurumi, 100C42.2   |
| Applications          | : strongly contaminated fluids, waste water, sewage, muddy water, ...   |
| Motor                 | : 3 x 400 V, 50 Hz  |
| Power output          | : 2,88 kW at 2.850 rpm  |
| Nominal current       | : 5,0 A   |
| Free impeller passage | : 44 mm   |
| Weight                | : 68 kg ( without cable )   |
| Height                | : 616 mm  |
| Diameter              | : Ø 594 mm  |
| Coupling              | : discharge side : Perrot quick coupling 4" male  |
| Characteristics       | : large free impeller passage<br>tungsten tipped singlechannel impeller which cuts up solids for pumping against a serrated suction cover |
| Equipment             | : 10 m power cable<br>start- stop switch with thermo-magnetic motor protection<br>plug 16A 5p   |