


100 SL

Diesel driven pump 4" on skid, sound attenuated



Curve Q-H

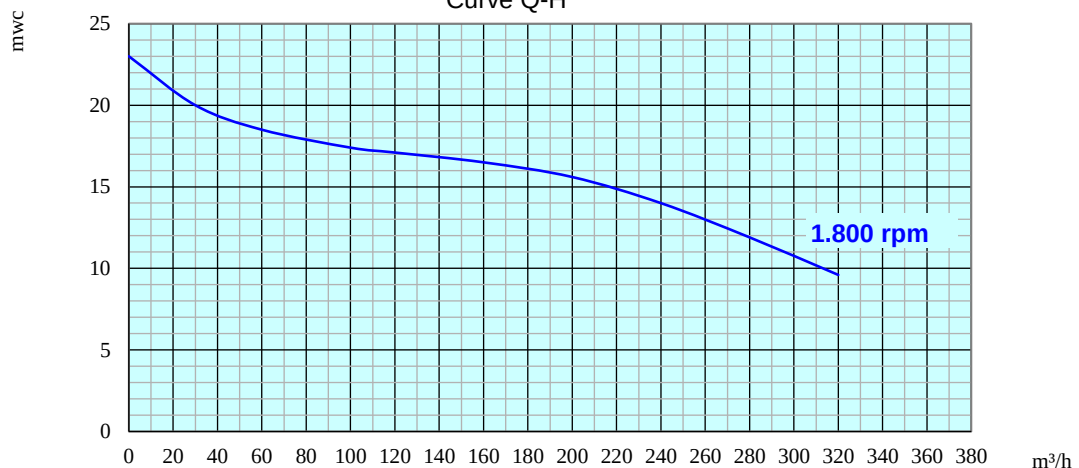

Type	: Pioneer 100SL
Applications	: sewage, sludge, slurry, ...
Engine	: Perkins watercooled diesel engine 403J-17, sound attenuated
Power output	: 18,9 kW at 1.800 rpm
Free impeller passage	: 76 mm
Starting system	: 12 V electric start
Weight	: 1.150 kg (full tank)
Tankage	: 125 liters
Consumption	: 3,9 liters/ hour at maximum capacity
Autonomy	: 32 h at maximum capacity
Dimensions	: 2.350 x 1.300 x 1.460 mm
Couplings	: suction and discharge side : Perrot quick coupling 4" male
Characteristics	: on skid, fully bunded canopy, sound attenuated 65 dB at 7 m automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: adjustable speed, float switches for automatic working, spark-arrestor central lifting eye, forklift pockets, threeway valve for the connection of an external fuel tank Viton seals