


100UZ43.7 Submersible sewage pump 4"



Curve Q-H

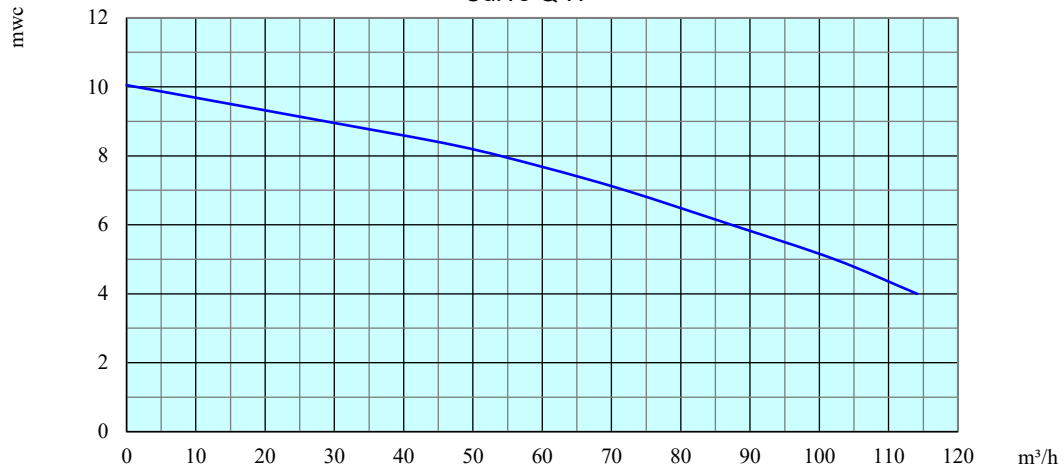

Type	: Tsurumi, 100UZ43.7
Applications	: strongly contaminated fluids, waste water, sewage, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,74 kW at 1.410 rpm
Nominal current	: 7,9 A
Free impeller passage	: 80 mm
Weight	: 79 kg (without cable)
Height	: 737 mm
Diameter	: Ø 628 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: large free impeller passage vortex impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p