


100VM-B

Diesel driven pump 4", sound attenuated

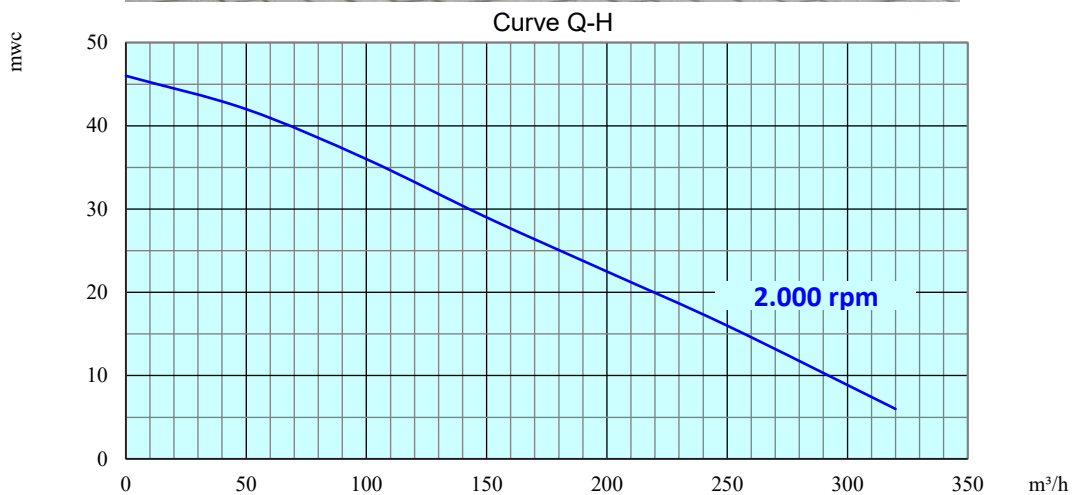

Type	: Pioneer 100VM-B
Applications	: Sludge, waste water, sewage, bentonite, ...
Engine	: Perkins 404D-22T
Power output	: 29,3 kW at 2.000 rpm
Free impeller passage	: 85 mm Ø
Starting system	: 12 V electrical start
Weight	: 1.630 kg
Tankage	: 260 litre
Consumption	: 6,5 litre/ hour at full load
Autonomy	: 40 h at full load
Dimensions	: 2.300 x 1.100 x 1.610 mm
Coupling	: suction : Perrot quick coupling 4" male : discharge : Perrot quick coupling 4" male
Characteristics	: on skid, sound attenuated, fully bunded canopy, automatic dry self priming, dry-running possible Extra door for easy acces to suction box, suction box with connections to rinse
Equipment	: adjustable speed, spark arrestor, master switch float switches for automatic working, socket for LEL-detection threeway valve for connection of an external fuel tank, central lifting eye and forklift pockets