


125 SM

Diesel driven pump 6", on skid, sound attenuated



Curve Q-H

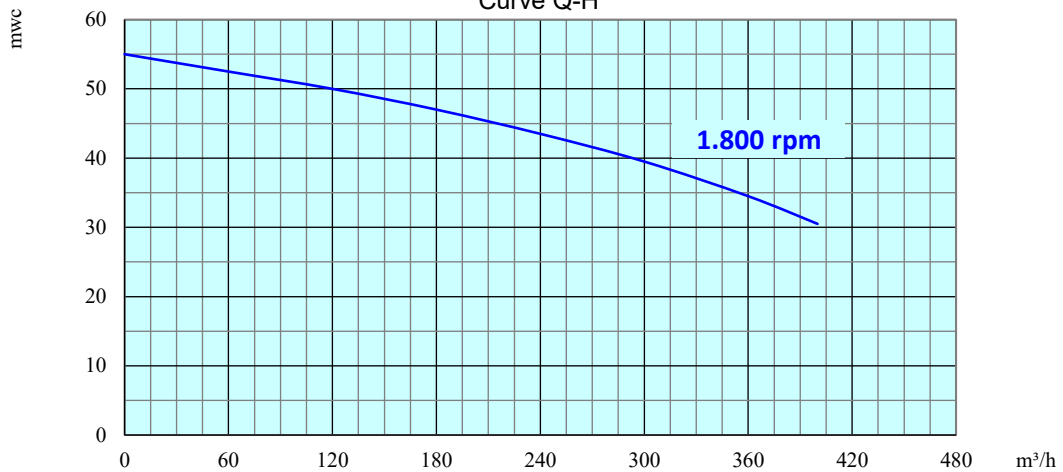

Type	: Pioneer 125 SM
Applications	: sewage, sludge, slurry, ...
Engine	: JCB 444 TC-63KW
Power output	: 54 kW at 1.800 rpm
Free impeller passage	: 76 mm
Starting system	: 12 V electric start
Weight	: 2.500 kg
Tankage	: 430 liters
Consumption	: 15,5 liters/ hour at maximum capacity
Autonomy	: 25 h at maximum capacity
Dimensions	: 2.600 x 1.180 x 1.950 mm
Couplings	: suction side : Perrot quick coupling 6" male : discharge side : Perrot quick coupling 4" male
Characteristics	: on skid, fully bunded canopy, sound attenuated automatic dry self priming, indefinite dry-running possible
Equipment	: adjustable speed, spark-arrestor, master switch automatic level adjustment by 2 floats central lifting eye, forklift pockets, threeway valve for the connection of an external fuel tank