


150 SL

Diesel driven pump 6" on skid, sound attenuated



Curve Q-H

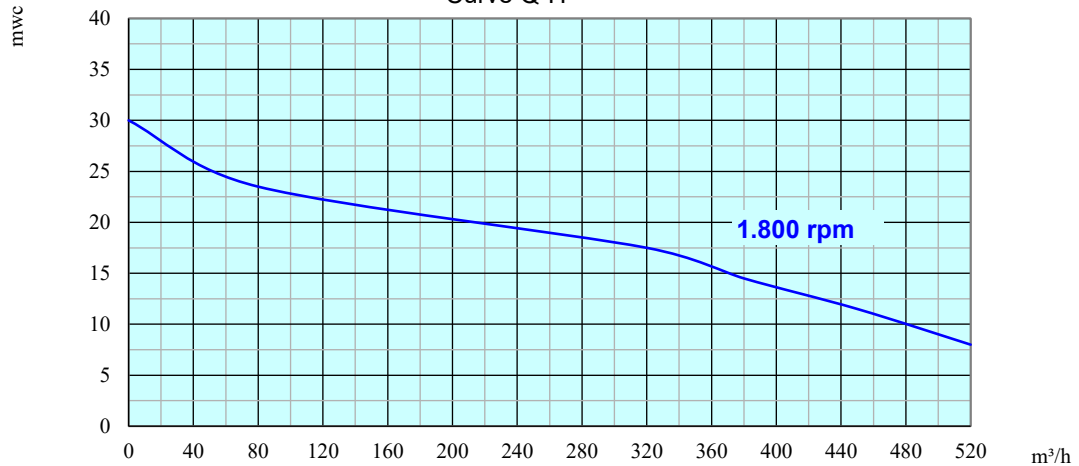

Type	: Pioneer 150SL
Applications	: sewage, sludge, slurry, ...
Engine	: Perkins watercooled diesel engine 404D-22, sound attenuated
Power output	: 23 kW at 1.800 rpm
Free impeller passage	: 76 mm
Starting system	: 12 V electric start
Weight	: 1.680 kg (full tank)
Tankage	: 200 liters
Consumption	: 7 liters/ hour at maximum capacity
Autonomy	: 28 h at maximum capacity
Dimensions	: 2.200 x 1.100 x 1.500 mm
Couplings	: suction side : Perrot quick coupling 6" male discharge side : DIN flange DN150 PN10
Characteristics	: on skid, fully bunded canopy, sound attenuated 64 dB at 7 m automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: adjustable speed, float switches for automatic working, Chalwyn valve, spark-arrestor central lifting eye, forklift pockets, threeway valve for the connection of an external fuel tank Viton seals