


150-TR2 Submersible aerator

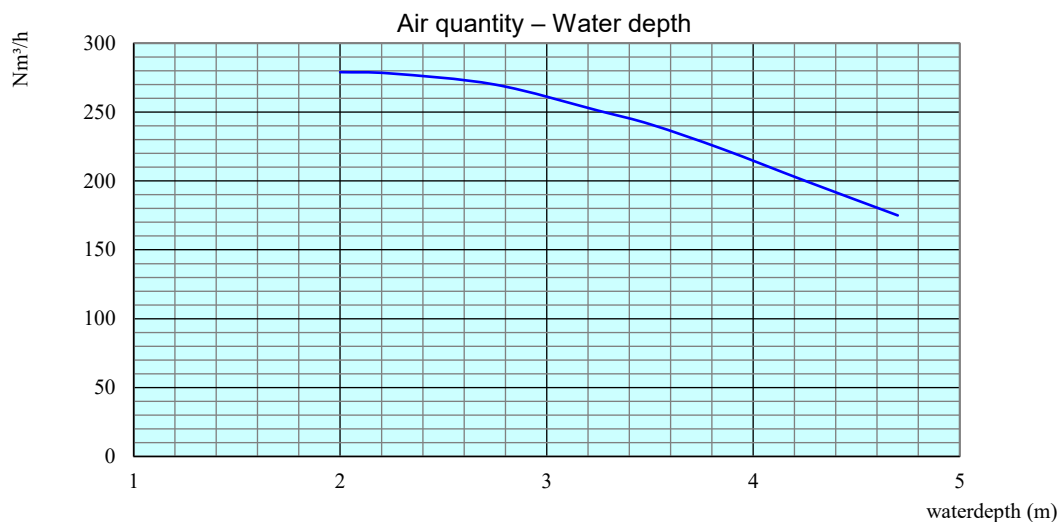

Type	: Tsurumi, 150-TR2
Applications	: aeration of activated sludge
Motor	: 3 x 400 V, 50 Hz
Power output	: 18,2 kW at 1.450 rpm
Nominal current	: 30 A
Weight	: 324 kg (without cable)
Height	: 1.155 mm
Diameter	: Ø 700 mm
Coupling	: air inlet with female threaded flange 3"
Characteristics	: good mixing, even at depth no haze, nor sedimentation simple installation and maintenance
Equipment	: mounted on foot stand, lifting chain 20 m power cable start - stop control box with thermo-magnetic motor protection, plug 63A 5P silencer with control valve