


## 50B2.75 (8-BE2)

### Submersible sewage pump 2"



Curve Q-H

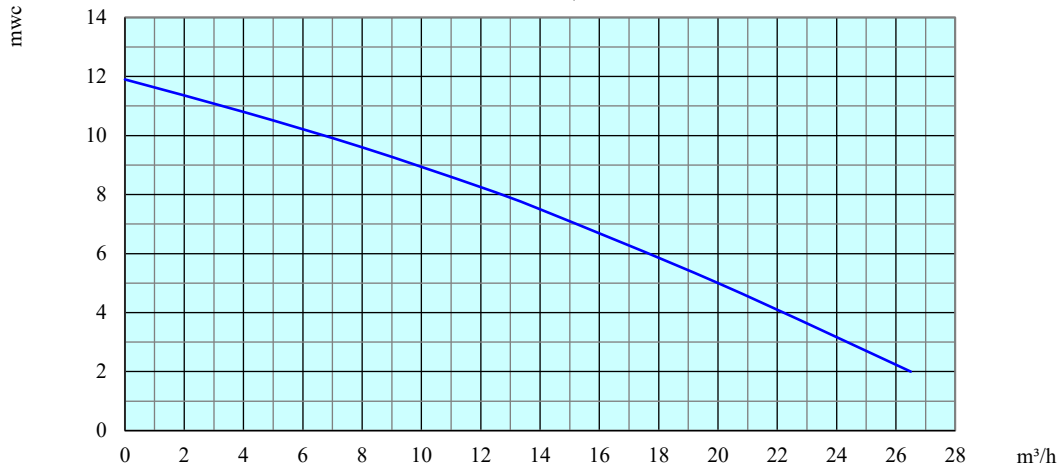

Type	: Tsurumi, 50B2.75
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,14 kW at 2.810 rpm
Nominal current	: 1,9 A
Free impeller passage	: 20 mm
Weight	: 25 kg ( without cable )
Height	: 439 mm
Diameter	: Ø 405 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: large free impeller passage open single-channel impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p