


50C2.75 (8-CE2)

Submersible cutter pump 2"



Curve Q-H

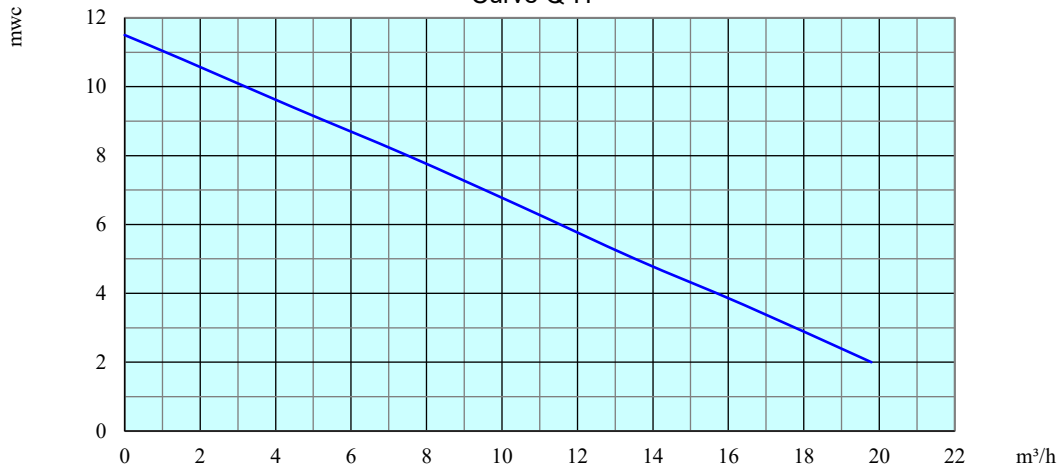

Type	: Tsurumi, 50C2.75
Applications	: for effluent transfer, in municipal or industrial applications
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,1 kW at 2.850 rpm
Nominal current	: 2,1 A
Free impeller passage	: 21 mm
Weight	: 24 kg (without cable)
Height	: 412 mm
Diameter	: Ø 405 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: large free impeller passage tungsten tipped singlechannel impeller which cuts up solids for pumping against a serrated suction cover
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p