


50UT2.4S Submersible sewage pump 2"

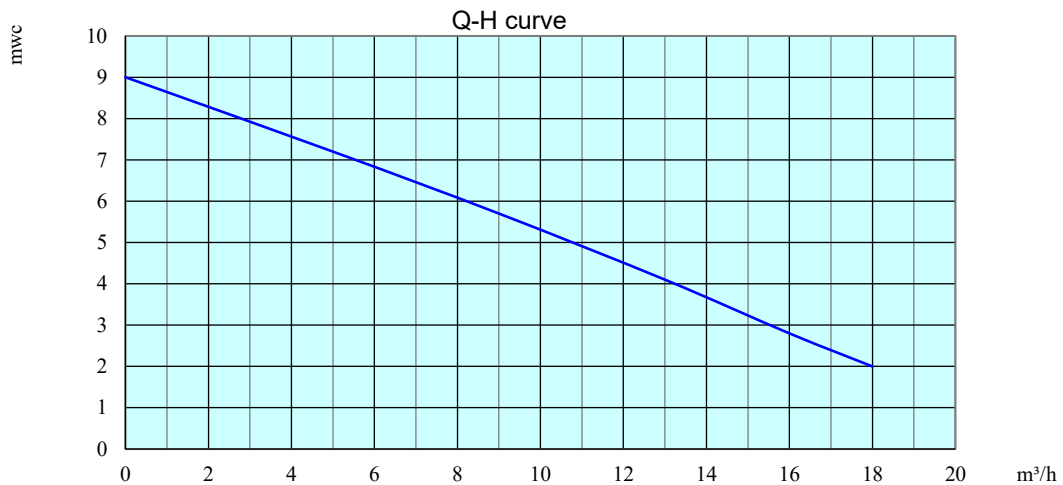

Type	: Tsurumi, 50UT2.4S
Applications	: waste water, sewage, muddy water, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 0,65 kW at 2.705 rpm
Nominal current	: 2,8 A
Free impeller passage	: 35 mm Ø
Weight	: 14 kg (without cable)
Height	: 350 mm
Diameter	: Ø 242 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: large free impeller passage vortex impeller
Equipment	: 10 m power cable electrical plug