


80CH-SS

Diesel driven pump 6", high pressure

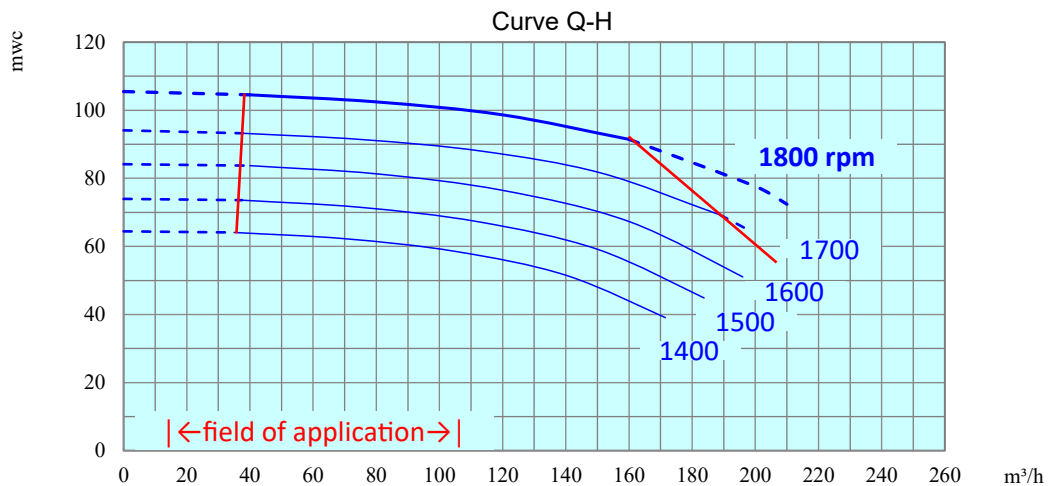

Type	: Pioneer PP63C17M2-E0311
Applications	: fluidization, fire fighting-like applications, clear to chemically polluted water (acids), ...
Engine	: JCB 444TC 4 cilinder diesel engine, watercooled, sound attenuated
Power output	: 61 kW at 1.800 rpm
Free impeller passage	: 19 mm
Starting system	: 12 V electrical start
Weight	: 2.500 kg (full tank)
Tankage	: 430 liters
Consumption	: 18 liters / hour at maximum capacity
Autonomy	: 23 h at maximum capacity
Dimensions	: 2.600 x 1.200 x 1.700 mm
Coupling	: suction : Perrot quick coupling 6" male stainless steel discharge : DIN-flange DN80 PN16 stainless steel
Characteristics	: on skid, sound attenuated, fully banded canopy, automatic dry self impriming, dry-running possible Pump in stainless steel ASTM A744 CD4Mcu, Seals with Viton
Equipment	: adjustable speed, spark-arrestor, Chalwyn valve, master switch automatic level adjustment by 2 floats threeway valve for the connection of an external fuel tank, central lifting eye, forklift pockets