


80SFQ21.5 (15-CL2) Stainless steel submersible pump 3"



Curve Q-H

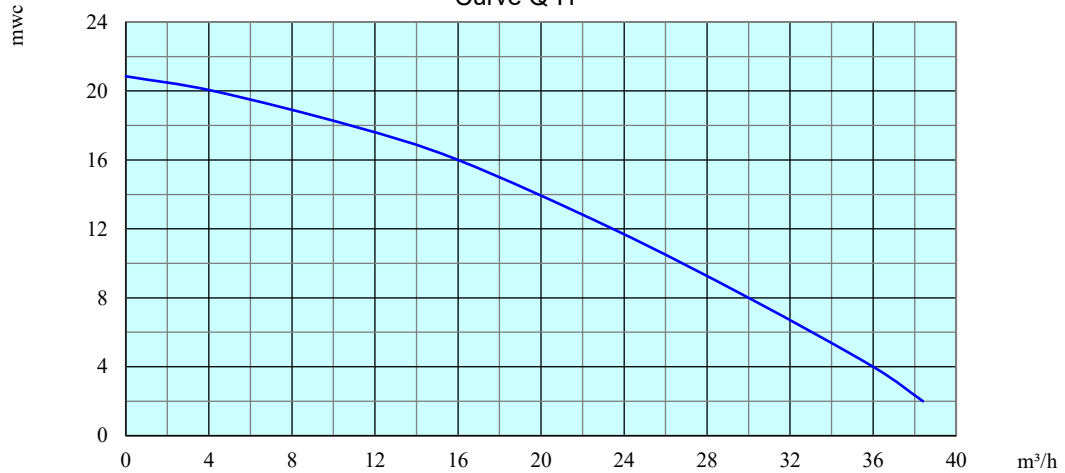

Type	: Tsurumi, 80SFQ21.5 (15-CL2)
Applications	: industry, chemically polluted water, waste water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 2,1 kW at 2.910 rpm
Nominal current	: 3,8 A
Free impeller passage	: 6 mm
Weight	: 36 kg (without cable)
Height	: 484 mm
Diameter	: Ø 329 mm
Couplings	: discharge side : stainless steel Perrot quick coupling 3" male
Particularities	: industrial submersible pump suction cover, pump and engine casing and impeller in stainless steel 316
Equipment	: 10 m power cable CEE start-stop motor protection plug 16A 5p