


80SFQ27.5 Stainless steel submersible pump 3"



Q-H curve

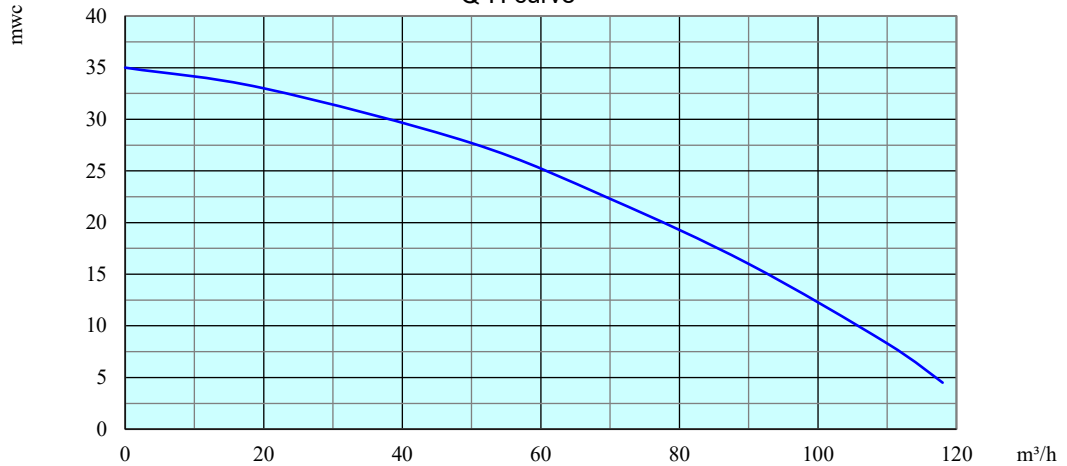

Type	: Tsurumi, 80SFQ27.5
Applications	: industry, chemically polluted water, waste water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 8,7 kW at 2.945 rpm
Nominal current	: 14,3 A
Free impeller passage	: 30 mm Ø
Weight	: 123kg (without cable)
Height	: 844 mm
Diameter	: Ø 635 mm
Couplings	: discharge side : stainless steel Perrot quick coupling 3" male
Particularities	: large free impeller passage suction cover, pump and engine casing and impeller in stainless steel 316
Equipment	: 10 m power cable CEE start-stop motor protection plug, phase control and phase inverter plug 32A 5p