


80U2.75 (U-80-8) Submersible sewage pump 3"



Curve Q-H

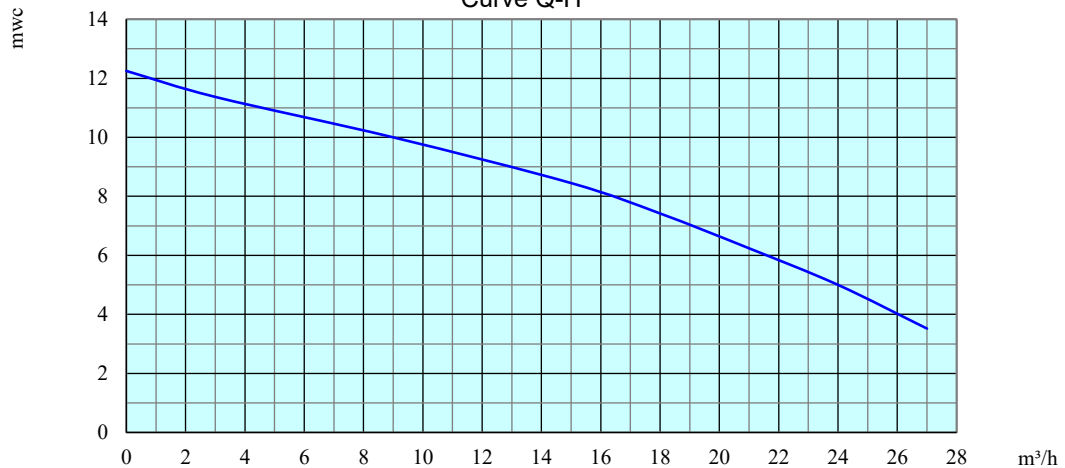

Type	: Tsurumi, 80U2.75
Applications	: waste water, sewage, mud, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,1 kW at 2.850 rpm
Nominal current	: 2,1 A
Free impeller passage	: 46 mm
Weight	: 28,5 kg (without cable)
Height	: 419 mm
Diameter	: Ø 383 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: large free impeller passage vortex impeller
Equipment	: 10 m power cable start-stop switch with thermo-magnetic motor protection plug 16A5P