


# 8NHG – TAD1375VE

## Diesel driven pump 14", high pressure

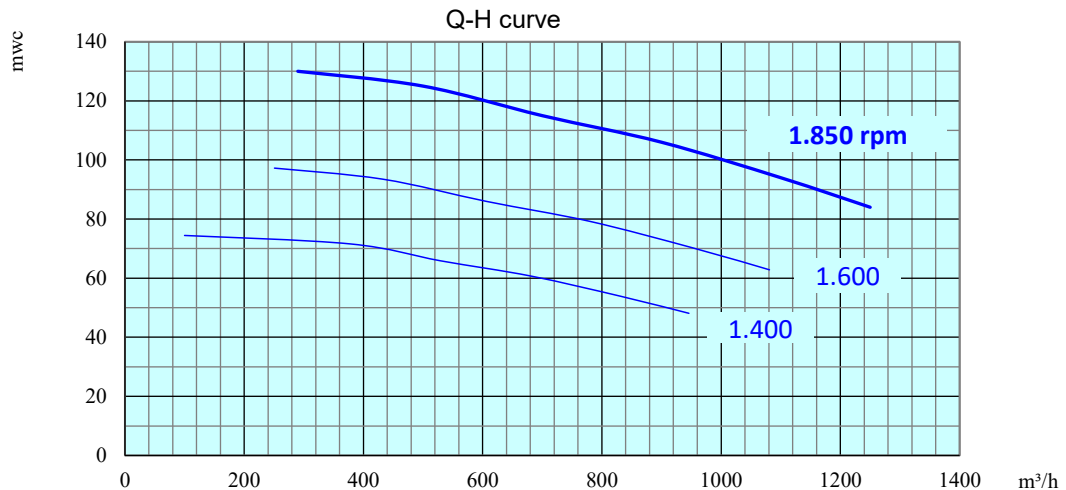

Type	: BBA BA-C200S8
Applications	: jetting, fire fighting-like applications, clear and polluted water, ...
Engine	: Volvo Penta TAD1375VE cylinder diesel engine, watercooled, sound attenuated
Power output	: 395 kW max. engine power at 1.850 rpm
Free impeller passage	: 62 mm $\varnothing$
Starting system	: 24 V electric start
Weight	: 10.000 kg ( dry )
Tankage	: 300 liters Adblue / 300 liters fuel
Consumption	: 99 liters/hour at maximum capacity
Autonomy	: 2,5h at maximum capacity
Dimensions	: 5.830 x 2.306 x 2.550 mm
Coupling	: suction : DIN-flange DN350 PN10 discharge : DIN-flange DN200 PN16
Characteristics	: on skid, sound attenuated fully bunded canopy ca. 82dB at 10m automatic dry self priming, dry-running possible
Equipment	: adjustable speed, spark-arrestor, Chalwyn valve, master switch Automatic level adjustment by 2 floats or probe 4-20 mA Threeway valve for the connection of an external fuel tank, 4 x lifting eye, forklift pockets