


BA-C100

Diesel driven pump 6", high pressure

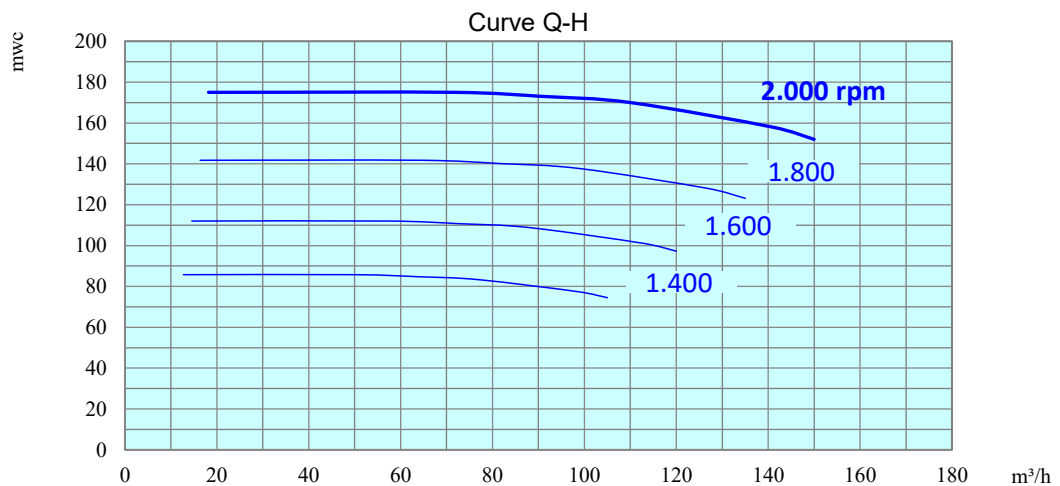

Type	: BBA BA-C100H40
Applications	: fluidization, fire fighting-like applications, clear and polluted water, mining , ...
Engine	: Perkins 1106D-E66TA 6 cilinder diesel engine, watercooled, sound attenuated
Power output	: 106.7 kW at 2.000 rpm
Free impeller passage	: 19 mm
Starting system	: 24 V electrical start
Weight	: 4.100 kg (full tank)
Tankage	: 300 liters
Consumption	: 28 liters / hour at maximum capacity
Autonomy	: 10,5 h at maximum capacity
Dimensions	: 4.500 x 1.250 x 2.000 mm
Coupling	: suction : Perrot quick coupling 6" male discharge : DIN-flange DN80 PN16
Characteristics	: on skid, sound attenuated, fully bunded canopy automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: adjustable speed, spark-arrestor, Chalwyn valve, master switch automatic level adjustment by 2 floats or probe 4-20 mA threeway valve for the connection of an external fuel tank, central lifting eye, forklift pockets