


## BA100 – Isuzu Diesel driven pump 4", sound attenuated



Curve Q-H

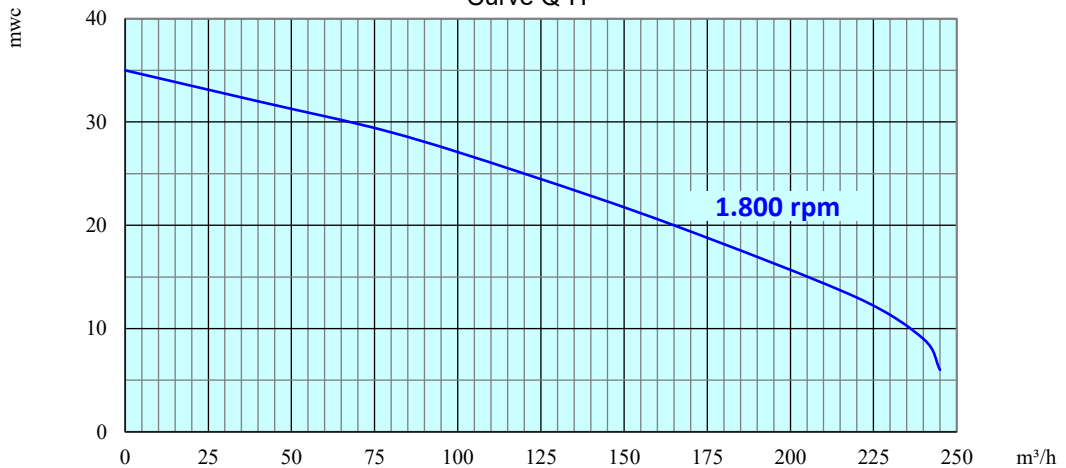

Type	: BA100 - Isuzu
Applications	: Sludge, waste water, sewage, ...
Engine	: Isuzu watercooled diesel motor, type 4JG1
Power output	: 30 kW at 1.800 rpm
Pump	: Centrifugal pump BA100E-D265 with two-channel impeller Ø 265 mm
Free impeller passage	: 80 mm
Starting system	: 12 V electrical start
Weight	: 2.350 kg ( full tank )
Tankage	: 350 liters
Consumption	: 7 liters / hour at maximum capacity
Dimensions	: 2.650 x 1.210 x 1.970 mm
Coupling	: suction and discharge : Perrot quick couplings 4" male
Characteristics	: automatic dry self priming. Indefinite dry-running possible without damage
Equipment	: sound attenuated, fully banded canopy 60 dB at 10 m adjustable speed, float switches for automatic working central lifting eye and forklift pockets, spark-arrestor threeway valve for connection of an external fuel tank