


BQY150M

Diesel driven pump 6", sound attenuated



Q-H curve

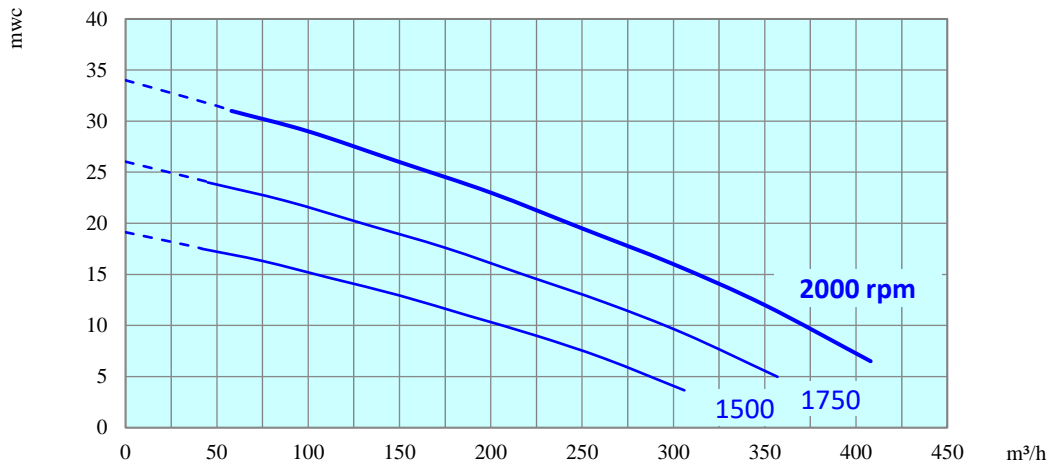

Type	: SPP Pumps, BQY150M
Applications	: sewage, sludge, slurry, ...
Engine	: Yanmar stage III watercooled diesel engine type 4TNV88
Power output	: 28 kW engine power at 2.000 rpm
Free impeller passage	: Ø 65 x 80 mm
Starting system	: 12 V electrical start
Weight	: 2.150 kg
Tankage	: 325 liters
Consumption	: 6,1 liters / hour at maximum capacity
Autonomy	: 50 h (at maximum capacity)
Dimensions	: 2.326 x 1.244 x 1.740 mm
Coupling	: suction : Triflex quick coupling 8" male discharge : Perrot quick coupling 6" male
Characteristics	: on skid, sound attenuated, fully bunded canopy 69 dB at 7 m automatic dry self priming, indefinite dry-running possible
Equipment	: adjustable speed, spark-arrestor, emergency switch, battery switch float switches for automatic working, socket for LEL detection threeway valve for the connection of an external fuel tank, central lifting eye, forklift pockets