


BS-154 EX Electrically driven pump 6"



Curve Q-H

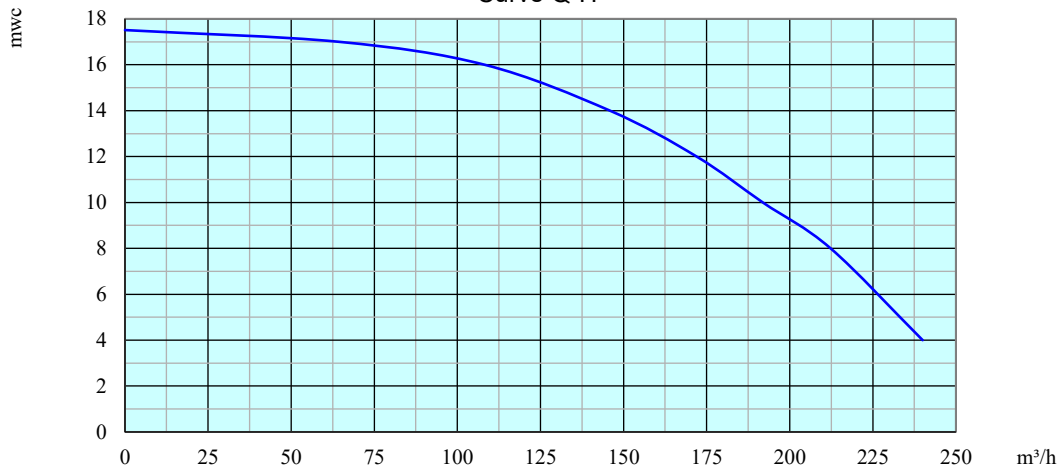

Type	: Eisele BS-154 EX
Applications	: sewage, sludge, bentonite, mud, ...
Motor	: 3 x 400V, 50 Hz, Ex II 2G Ex dII BT4
Power output	: 15 kW at 1.455 rpm
Nominal current	: 28,4 A
Free impeller passage	: 35 mm
Weight	: 750 kg
Dimensions	: 2.540 x 900 x 1.575 mm
Coupling	: suction and discharge side : Perrot quick couplings 6" male
Characteristics	: dry self priming up to 7 m indefinite dry running possible, without damage large free impeller passage
Equipment	: forklift pockets – central lifting eye explosion proof switch with thermo-magnetic motor protection, start/stop, Ex II 2G EEx d [ia] IIB T6, power cable 20m, A.T.X. plug 32A 5p Ex II 2G Ex ed IIC T6 equipped with 1 explosion proof float l=20m Ex II 2G Ex ia IIB T5