


CD-100M SK

Diesel driven pump 4" on skid, sound attenuated



Curve Q-H

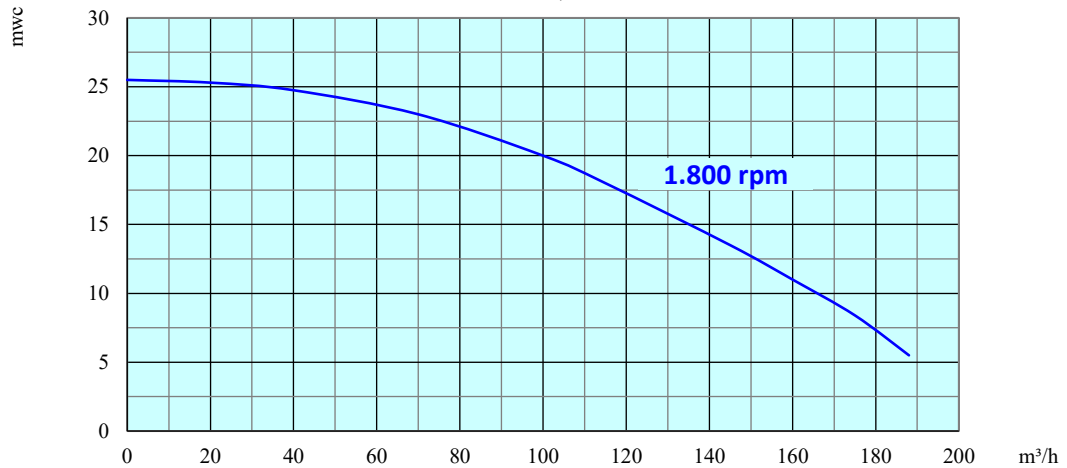

Type	: Godwin Pumps, Dri-Prime, CD-100M
Applications	: Sewage, sludge,...
Engine	: Perkins watercooled diesel engine, type 403D.15
Power output	: 14 kW at 1.800 rpm
Free impeller passage	: Ø 45 mm
Starting system	: 12 V electrical start
Weight	: 1.200 kg (full tank)
Tankage	: 145 liters
Consumption	: 3,5 liters/ hour at maximum capacity
Autonomy	: 41 h (at maximum capacity)
Dimensions	: 1.940 x 1.050 x 1.500 mm
Coupling	: suction and discharge : Perrot quick couplings 4" male
Characteristics	: on skid Automatic dry self priming, can run completely dry without damage
Equipment	: sound attenuated, fully banded canopy 65 dB at 7 m adjustable speed, float switches for automatic working central lifting eye and forklift pockets, battery switch, spark-arrestor threeway valve for connection of an external fuel tank