


CD-225ME/55 Electrically driven pump 10"

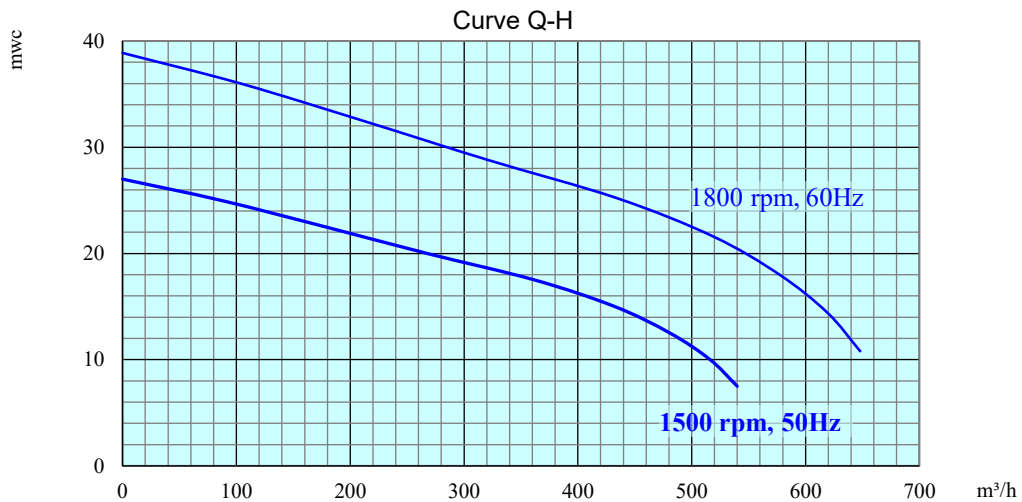

Type	: Godwin Pumps, Dri-Prime, CD-225ME
Applications	: sewage, sludge, muddy water, ...
Motor	: 3 x 400 V ; 50 Hz
Power output	: 55,0 kW at 1.500 rpm
Nominal current	: 97,6 A
Free impeller passage	: Ø 75 mm
Weight	: 2.140 kg
Dimensions	: 2.700 x 1.300 x 1.820 mm
Coupling	: suction side : Triflex quick coupling 10" male : discharge side : flange DIN DN200 PN10
Characteristics	: dry self priming centrifugal pump, equipped with membrane pump MP50 non return valve at discharge side, large free impeller passage 20m supply cable with free cable end + PTC resistor with 20m cable (delivered without control panel) Optional: frequency control possible via our mobile control system unit
Equipment	: lifting eye, stackable chassis