


DERBY EX 75 Explosion proof, submersible pump 2"



Curve Q-H

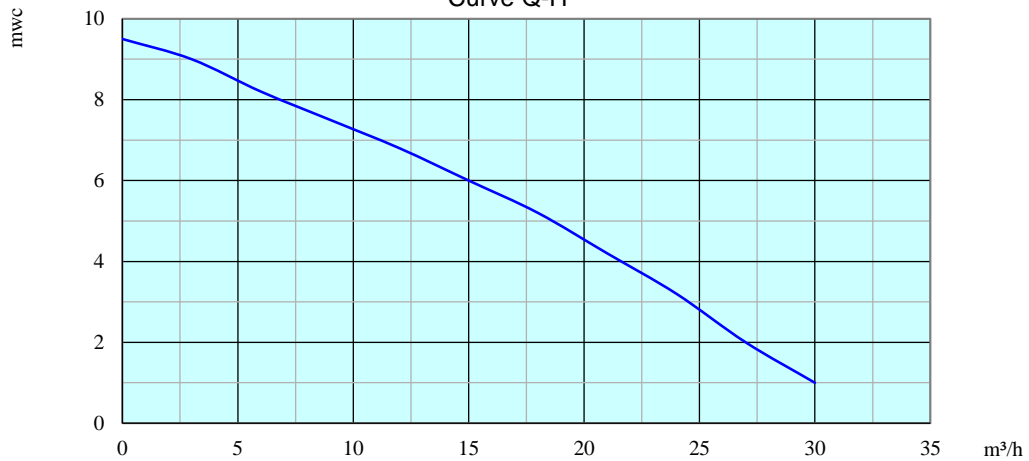

Type	: OFT, DERBY EX 75
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz, II 2G Ex eb h mb ob IIC T5 Gb
Power output	: 0,55 kW at 2.850 rpm
Nominal current	: 1,7 A
Free impeller passage	: Ø 10 mm
Weight	: 16,7 kg (pump without cable and motor protection)
Height	: 445 mm
Diameter	: Ø 230 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: impeller in cast iron
Equipment	: 10 m power cable between pump and motor protection, 2 meter cable between protection and plug motor protection Ex II 2G Ex d e IIC T6 A.T.X. plug 16A 5P 400 V/ 50 Hz Ex II 2 G Eex ed IIC T6