


Delta 120/2ET Electrically driven pump 4"



Curve Q-H

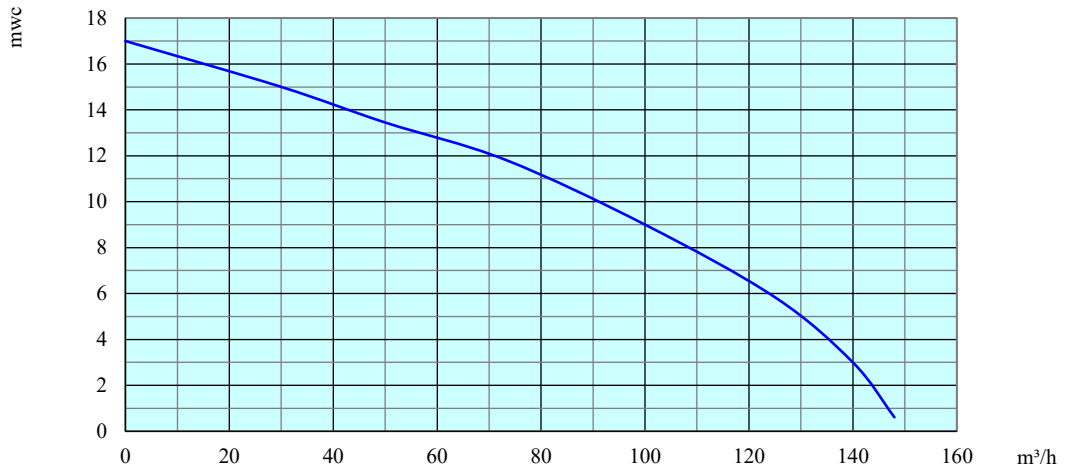

Type	: Parma Delta 120/2ET
Applications	: bentonite, slurry, sewage, muddy water, ...
Motor	: 3 x 400V, 50 Hz
Power output	: 11 kW at 1.450 rpm
Nominal current	: 21,2 A
Free impeller passage	: 30 mm
Weight	: 320 kg
Dimensions	: 1.420 x 1.000 x 1.350
Coupling	: suction and discharge side : Perrot quick couplings 4" male
Characteristics	: self priming, after a first filling of the pump casing large free impeller passage easy to move
Equipment	: two-wheel site trailer lifting eye 32A 5P CEE plug male