


E05K-S01 Electrically driven pump 6"



Curve Q-H

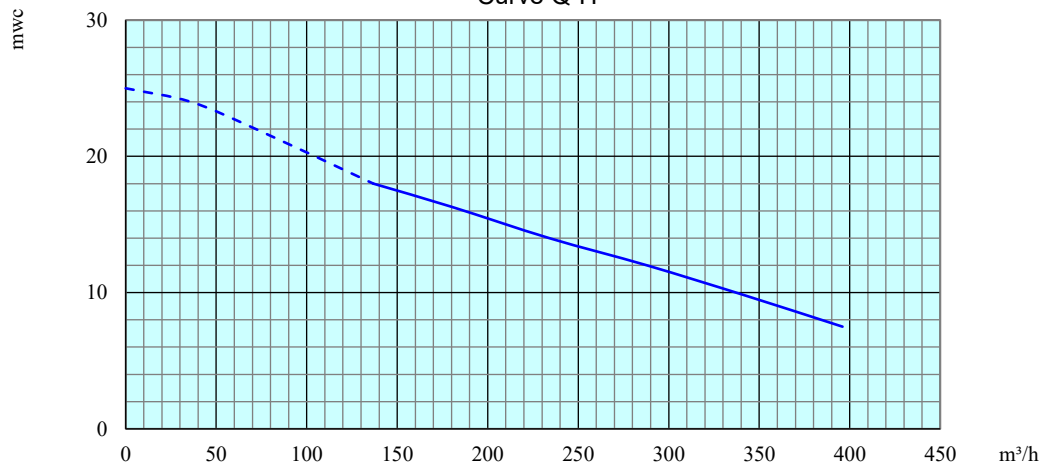

Type	: E05K-S01
Applications	: sewage, contaminated water, bentonite, ...
Motor	: 3 x 400V, 50 Hz
Power output	: 22 kW at 1.450 rpm
Nominal current	: 41,7 A
Run-up	: star-delta
Free impeller passage	: 100 mm
Weight	: 1.380 kg
Dimensions	: 2.220 x 1.060 x 1.600 mm
Coupling	: suction and discharge side : Perrot quick couplings 6" male
Characteristics	: dry self priming centrifugal pump, equipped with vacuum pump MP100 vacuum pump separately switchable, suction box with possibility to rinse compact pump, with non return valve at discharge side, large free impeller passage 2 float switches for automatic start/stop, plug 63A 5p male
Equipment	: stackable subframe, with forklift pockets and lifting eye