


E125-S01R Submersible sewage pump 6"



Curve Q-H

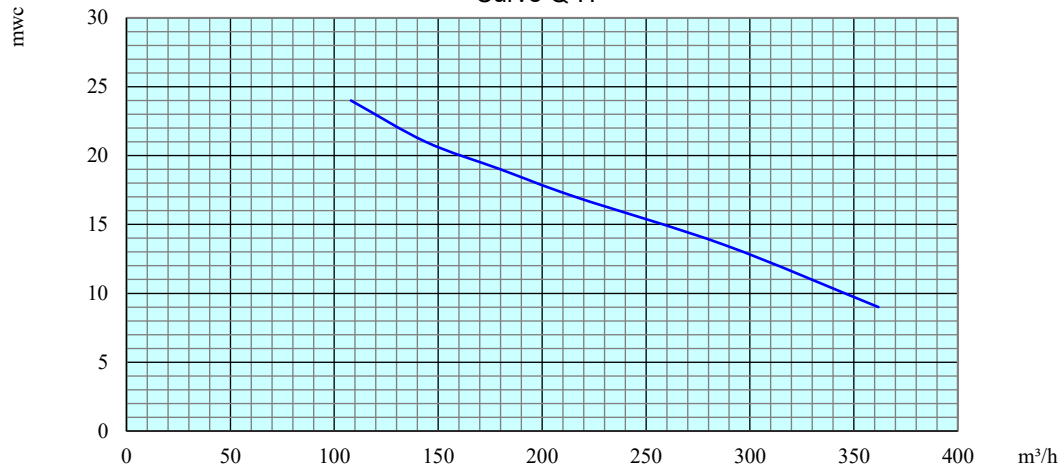

| | |
|-----------------------|---|
| Type | : Hidrostal, E125-S01R |
| Applications | : strongly contaminated fluids, waste water, sewage, mud water, ... |
| Motor | : 3 x 400 V, 50 Hz |
| Power output | : 18,5 kW at 1.462 tr/min |
| Nominal current | : 39 A |
| Run-up | : star/delta |
| Free impeller passage | : 90 mm |
| Weight | : 404 kg (excl. Control box) |
| Height | : 1.540 mm |
| Diameter | : length : 925 mm x width : 610 mm |
| Coupling | : Perrot quick coupling 6" male |
| Characteristics | : large free impeller passage screw centrifugal impeller PTC resistor in motor and water detector in oil chamber oil filled cooling jacket |
| Equipment | : 20 m power cable control panel, suitable for outdoor use, incl. 2 float switches, L=20m plug 63A 5p |