


EL35B Submersible dredge pump 4"



Curve Q-H

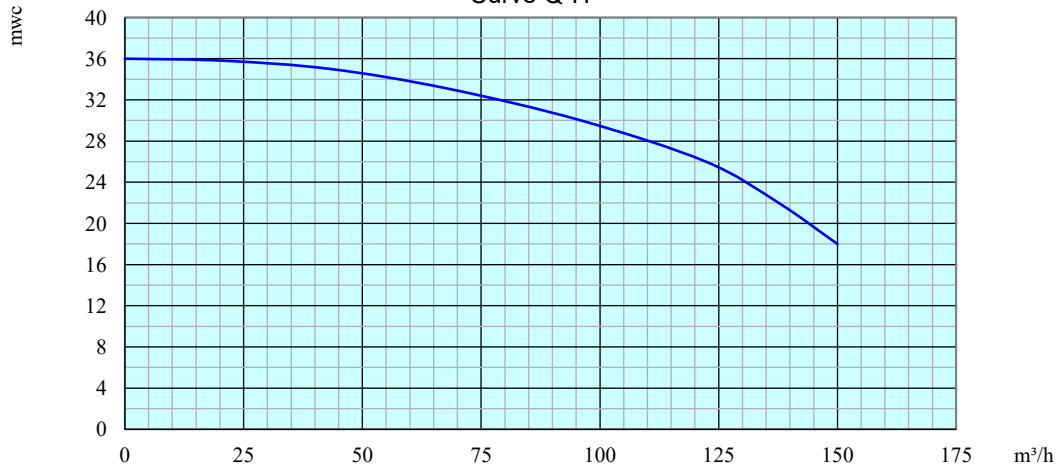

Type	: Dragflow, EL35B
Applications	: heavy dredging, (liquids containing mud, slurry, bentonite)
Motor	: 3 x 400 V, 50 Hz
Power output	: 31,5 kW at 980 rpm
Nominal current	: 54 A
Free impeller passage	: 35 mm
Weight	: 760 kg (without cable)
Height	: 2.000 mm
Diameter	: Ø 950 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: with agitator, to put solids in suspension ready for pumping durable, hard-wearing submersible pump , low rotational speed impeller in chromium iron
Equipment	: 35 m power cable control panel, suitable for outdoor use, softstarter plug 63A 5p