


GSP900SV Submersible pump 10"

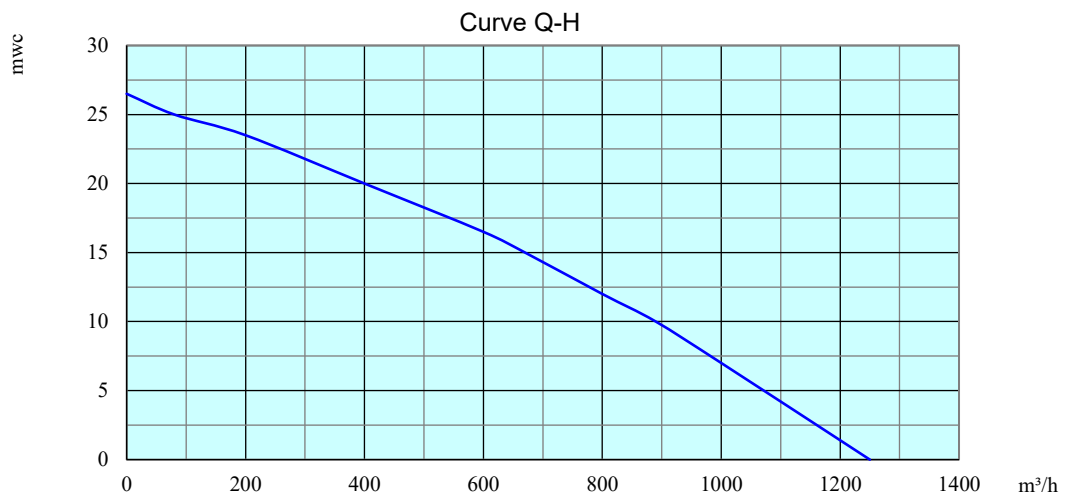

Type	: Godwin, GSP900SV
Applications	: clear water, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 62 kW at 1.500 rpm
Nominal current	: 107 A
Free impeller passage	: 12 mm
Weight	: 760 kg (pump + cable + control panel)
Height	: 1.600 mm
Diameter	: Ø 750 mm
Coupling	: discharge side : DIN flange DN250 PN10
Characteristics	: durable, efficient submersible pump control panel suitable for outdoor use, 2 float switches l = 30 meter, plug CEE 125A 5P control panel includes soft-starter (starting current 320 A)
Equipment	: 35 m power cable