


GSZ2-75-4L Submersible pump 10"



Curve Q-H

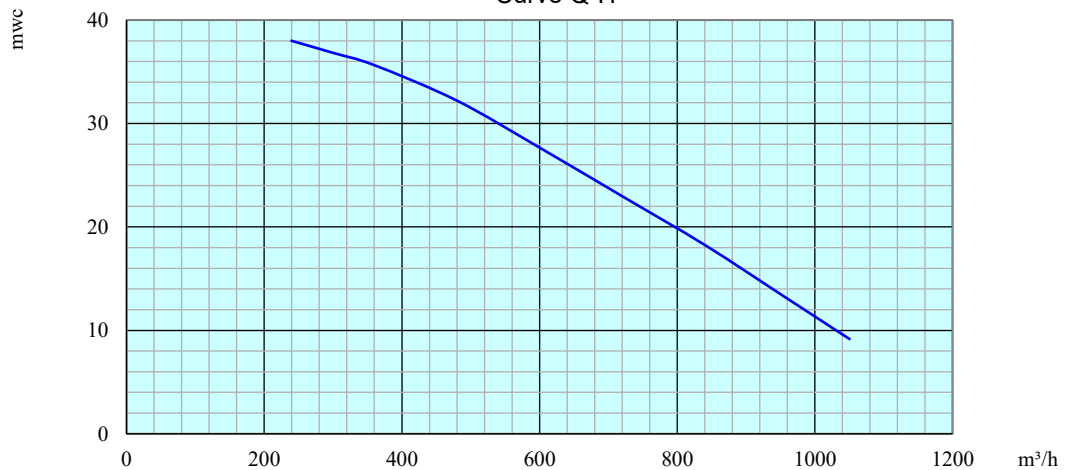

Type	: Tsurumi, GSZ2-75-4L
Applications	: clear water, water containing mud or sand, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 85 kW at 1.500 rpm
Nominal current	: 152 A
Free impeller passage	: Ø 25 mm
Weight	: 1.340 kg (pump + cable + control panel)
Height	: 2.550 mm
Diameter	: Ø 1.050 mm
Coupling	: discharge side : DIN flange DN250 PN10
Characteristics	: durable, hardwearing pump
Equipment	: 35 m cable between pump and control panel – 15 m cable between control panel and power connection control panel suitable for outdoor use, 2 float switches l = 20 meter free cable end with eyes Ø 12mm