


H119 DGA EX Explosion proof submersible pump 2"



Curve Q-H

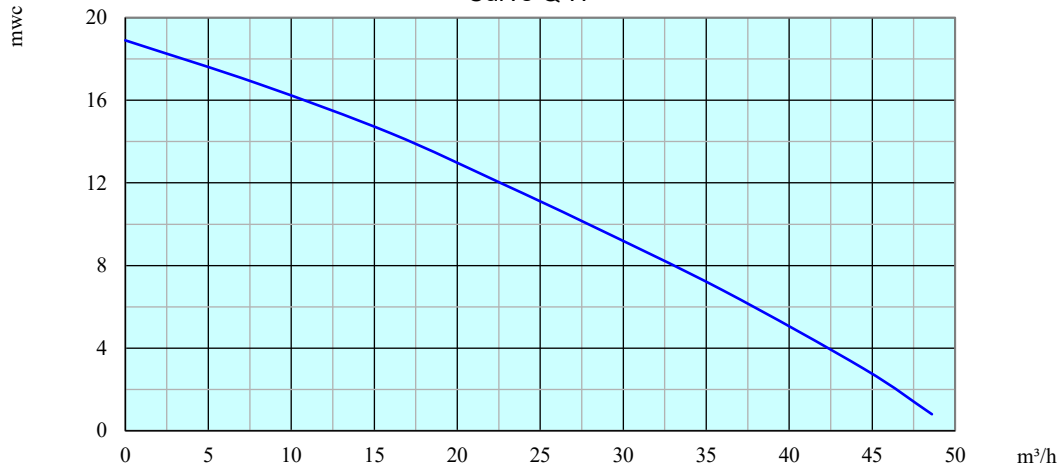

Type	: Homa, H119 DGA EX
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,50 kW at 2.900 rpm
Nominal current	: 2,9 A
Free impeller passage	: Ø 10 mm
Weight	: 26 kg (pump without cable and control box)
Height	: 426 mm
Diameter	: Ø 349 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: ATEX Ex II 2G Ex c d II BT4
Equipment	: 15 meter power cable control panel non-ATEX with thermo-magnetic motor protection, equipped with 1 explosion proof float l = 20 meter, Ex II 1G Ex ia IIC T6 plug 16A 5p non-ATEX