


K100H/F32

Diesel driven pump 4", high pressure

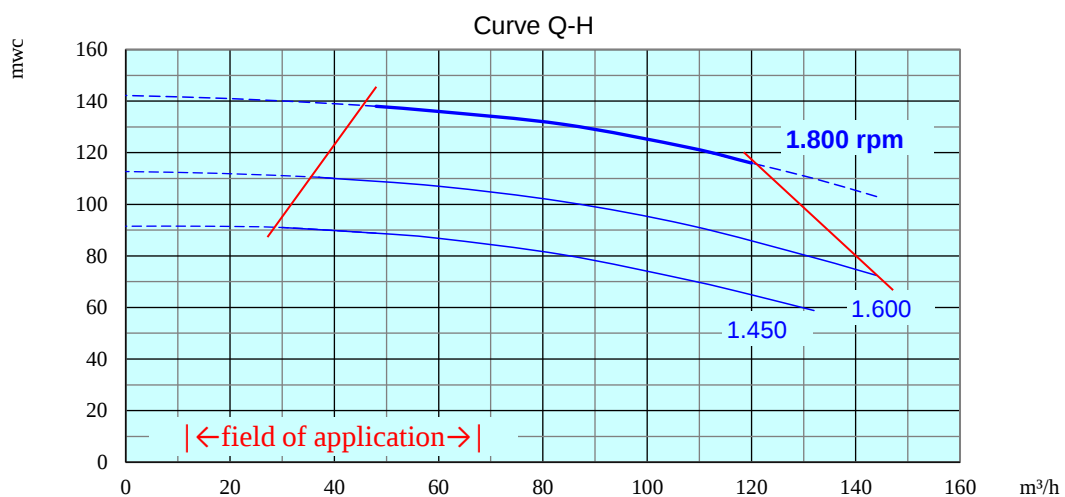

Type	: F33K100H/3E
Applications	: fluidization, fire fighting-like applications, slightly polluted water
Engine	: Iveco four cilinder diesel engine, watercooled, type F32
Power output	: 52 kW at 1.800 rpm
Free impeller passage	: 8 mm
Starting system	: 12 V electrical start
Weight	: 2.430 kg (full tank)
Tankage	: 1.000 liters
Consumption	: 12,5 liters/ hour at maximum capacity
Autonomy	: ca. 80 h
Dimensions	: 2.500 x 1.150 x 1.800 mm
Coupling	: suction: Perrot quick coupling 4" male discharge: DIN flange DN100 PN16, gate valve DN100 PN16 included
Characteristics	: not self priming (to be filled with internal tank and venturi system) fully bunded canopy, sound attenuated
Equipment	: adjustable speed, pump security