


KRS-1022 Submersible drainage pump 10"



Curve Q-H

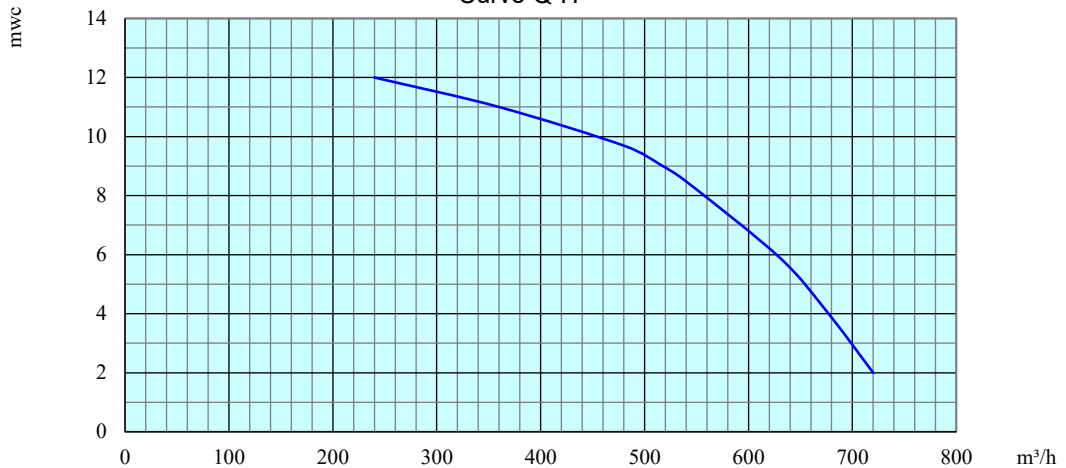

Type	: Tsurumi, KRS-1022
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 26,5 kW at 1.450 rpm
Nominal current	: 44 A
Free impeller passage	: 25 mm
Weight	: 450 kg (without cable)
Height	: 1.439 mm
Diameter	: Ø 520 mm
Coupling	: discharge side : DIN flange DN250 PN10
Characteristics	: durable, hardwearing contractor pump robust high-efficiency dewatering pump impeller in ductile iron casting
Equipment	: 20 m power cable Stop-auto-start control panel suitable for use outdoors, 2 float switches, 1 = 20 meter plug 63A 5p