


KRS-815 Submersible drainage pump 6"



Curve Q-H

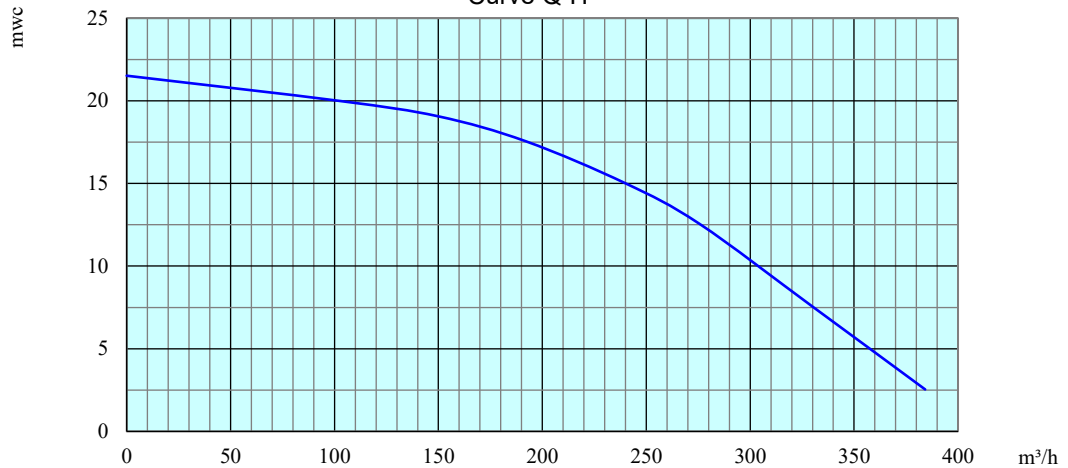

Type	: Tsurumi, KRS-815
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 17,6 kW at 1.450 rpm
Nominal current	: 30,5 A
Free impeller passage	: 25 mm
Weight	: 235 kg (without cable)
Height	: 1.069 mm
Diameter	: Ø 481 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: durable, hardwearing contractor pump robust high-efficiency dewatering pump impeller in ductile iron casting
Equipment	: 20 m power cable stop-auto-start control panel suitable for use outdoors, 2 float switches, 1 = 20 meter plug 63A 5p