


KRS-822L

Submersible contractors drainage pump 6"



Curve Q-H

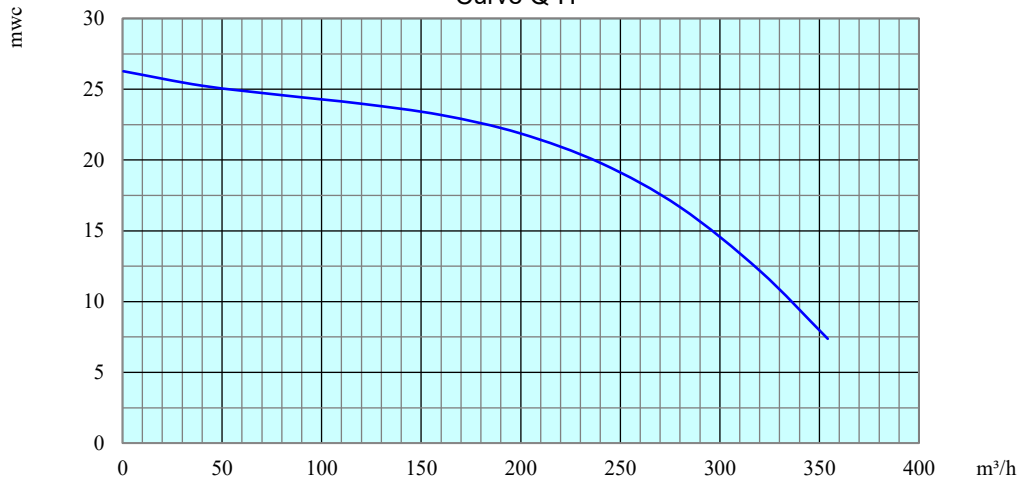

Type	: Tsurumi, KRS-822L
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 27,09 kW at 1.455 rpm
Nominal current	: 44,6 A
Free impeller passage	: 25 mm
Weight	: 380 kg (without cable)
Height	: 1.238 mm
Diameter	: Ø 572 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: durable, wear-resisting contractor pump robust high-efficiency pump impeller in ductile iron casting
Equipment	: 20 m power cable between pump and control panel, 5 m between control panel and plug Stop-auto-start control panel suitable for use outdoors, 2 float switches, 1 = 20 meter plug 63A 5p male