


## KRS-D8 Submersible drainage pump 6"



Curve Q-H

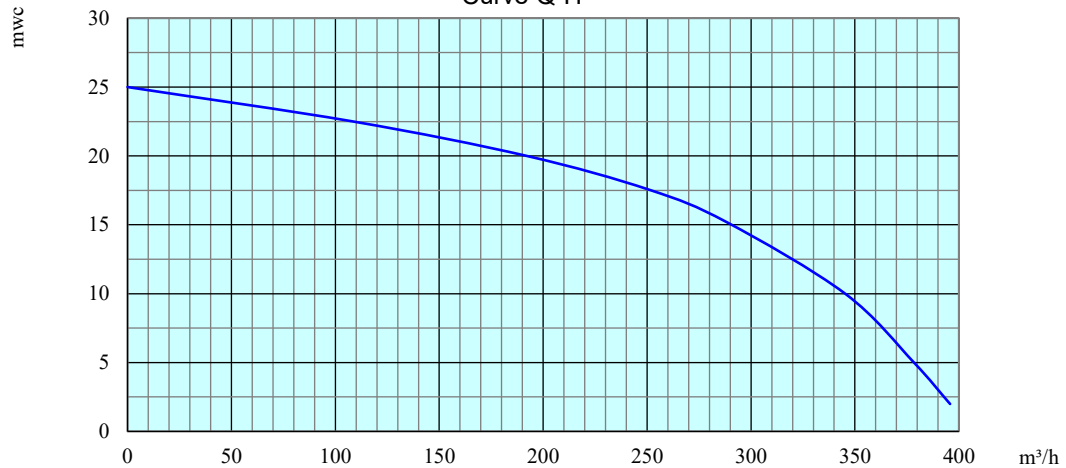

|                       |  |
|-----------------------|--|
| Type                  | : Tsurumi, KRS-D8  |
| Applications          | : sandy, muddy water, ...  |
| Motor                 | : 3 x 400 V, 50 Hz   |
| Power output          | : 26,5 kW at 1.450 rpm   |
| Nominal current       | : 45 A   |
| Free impeller passage | : 25 mm  |
| Weight                | : 400 kg ( without cable )   |
| Height                | : 1.232 mm   |
| Diameter              | : Ø 530 mm   |
| Coupling              | : discharge side : Perrot quick coupling 6" male   |
| Characteristics       | : durable, hardwearing site pump<br>robust high-efficiency pump<br>impeller in ductile iron casting                          |
| Equipment             | : 20 m power cable<br>Stop-auto-start control panel suitable for use outdoors, 2 float switches, 1 = 20 meter<br>plug 63A 5p |