


KRS2-150 Submersible dredge pump 6"



Curve Q-H

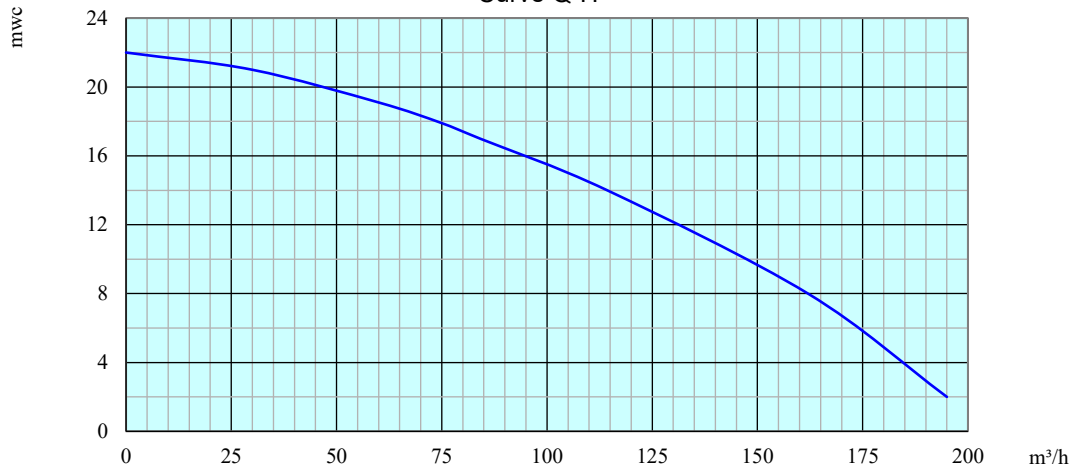

| | |
|-----------------------|---|
| Type | : Tsurumi, KRS2-150 |
| Applications | : light dredging, (liquids containing mud, slurry, bentonite) |
| Motor | : 3 x 400 V, 50 Hz |
| Power output | : 10,8 kW at 1.450 rpm |
| Nominal current | : 18,5 A |
| Free impeller passage | : 30 mm |
| Weight | : 170 kg (without cable) |
| Height | : 879 mm |
| Diameter | : Ø 433 mm |
| Coupling | : discharge side : Perrot quick coupling 6" male |
| Characteristics | : agitator, to put solids in suspension ready for pumping durable, hard-wearing submersible pump open impeller in chromium iron |
| Equipment | : 20 m power cable start- stop switch with thermo-magnetic motor protection plug 32A 5p |