


KRS2-80 Submersible dredge pump 3"



Curve Q-H

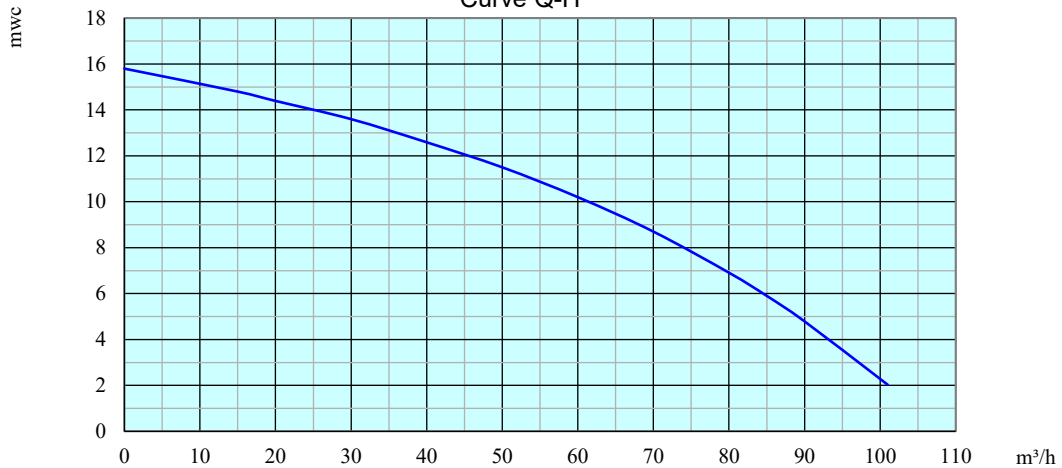

Type	: Tsurumi, KRS2-80
Applications	: light dredging, ... (water containing mud, slurry, bentonite)
Motor	: 3 x 400 V, 50 Hz
Power output	: 5,2 kW at 1.450 rpm
Nominal current	: 9,5 A
Free impeller passage	: 30 mm
Weight	: 105 kg (without cable)
Height	: 786 mm
Diameter	: Ø 350 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: agitator, to put solids in suspension ready for pumping durable, hard-wearing submersible pump open impeller in chromium iron
Equipment	: 20 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p