


KTV2-37H Semi-vortex submersible pump 2"



Curve Q-H

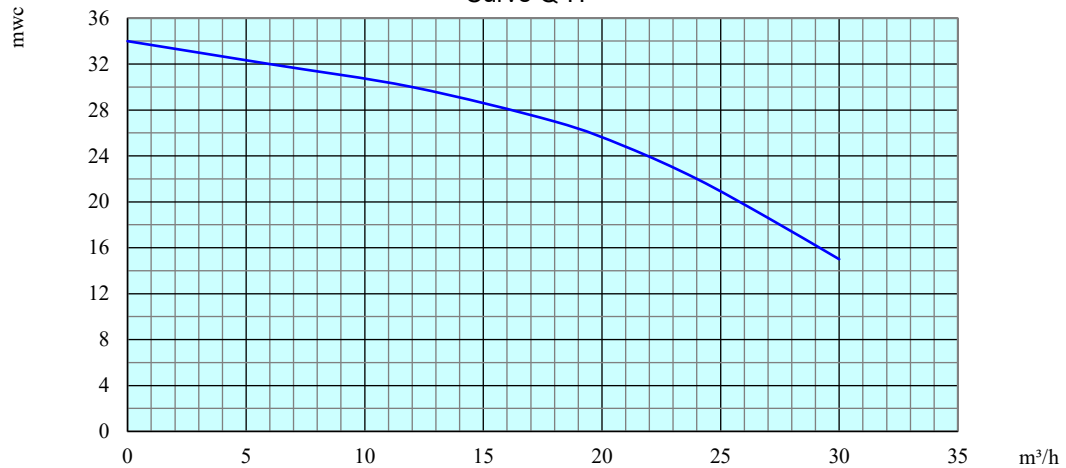

| | |
|-----------------------|--|
| Type | : Tsurumi, KTV2-37H |
| Applications | : muddy, sand carrying water, ... |
| Motor | : 3 x 400 V, 50 Hz |
| Power output | : 4,64 kW at 2.850 rpm |
| Nominal current | : 7,4 A |
| Free impeller passage | : 8,5 mm |
| Weight | : 35 kg (without cable) |
| Height | : 510 mm |
| Diameter | : Ø 285 mm |
| Coupling | : discharge side : Perrot quick coupling 2" male |
| Characteristics | : durable, hardwearing yet light pump compact contractor pump suction cover and pump casing with thick rubber lining |
| Equipment | : 20 m power cable start - stop switch with thermo-magnetic motor protection plug 16A 5p male |