


KTV2-80 Submersible dredge pump 3"

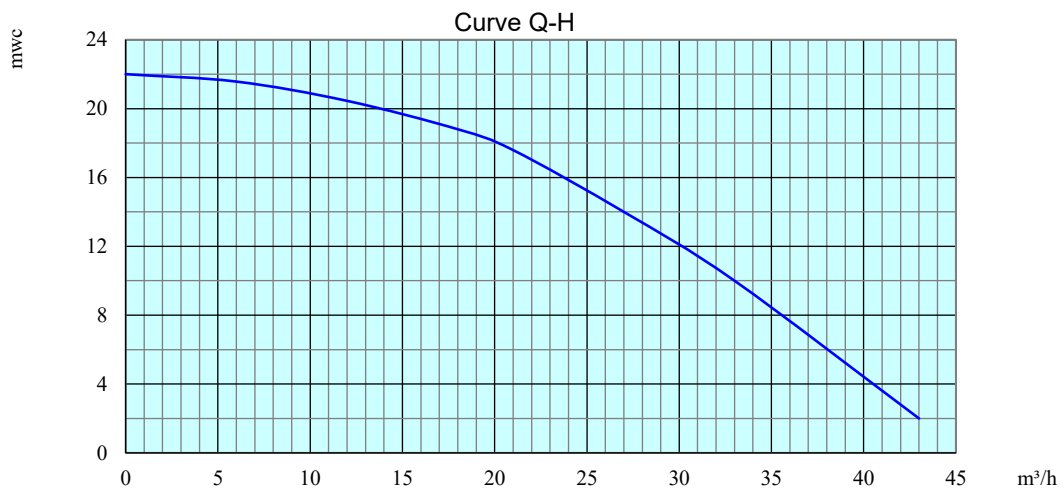

Type	: Tsurumi, KTV2-80
Applications	: light dredging applications, ... (liquids containing mud, slurry,...)
Motor	: 3 x 400 V, 50 Hz
Power output	: 3,9 kW at 2.850 rpm
Nominal current	: 6,1 A
Free impeller passage	: 10 mm
Weight	: 37 kg (without cable)
Height	: 550 mm
Diameter	: Ø 285 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: agitator, to put solids in suspension ready for pumping durable, hardwearing submersible pump semi-vortex impeller in chromium iron
Equipment	: 20 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p