


KTV3-55 Semi-vortex submersible pump 3"

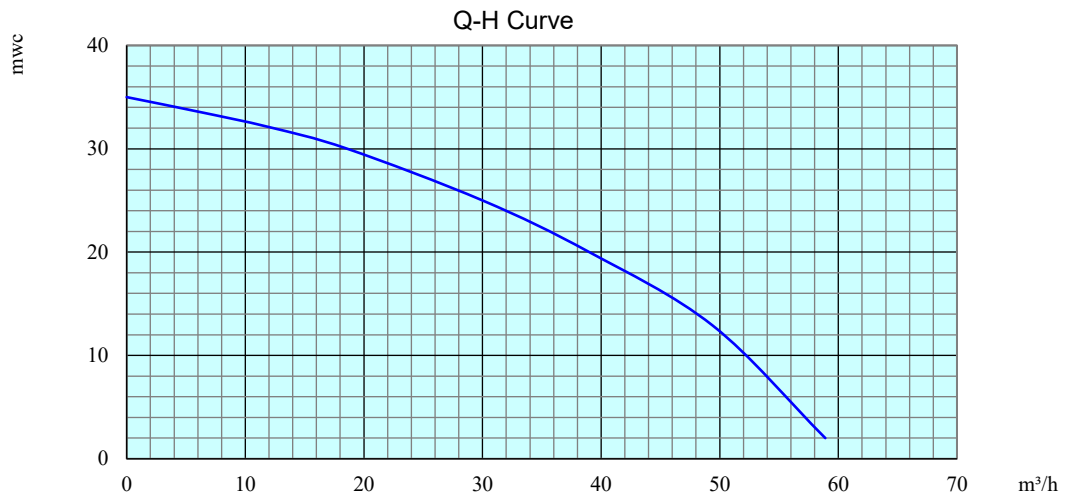

Type	: Tsurumi, KTV3-55
Applications	: mud, gritty water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 7,06 kW at 2.870 tr/min
Nominal current	: 11 A
Free impeller passage	: 8,5 mm
Weight	: 47 kg (without cable)
Height	: 730 mm
Diameter	: Ø 300 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: durable, hardwearing yet light submersible pump compact contractor pump suction cover and pump casing with thick rubber lining
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection plug with phase inverter 16A 5p male