


KTVE33.7

Semi-vortex submersible pump 3" with probe



Curve Q-H

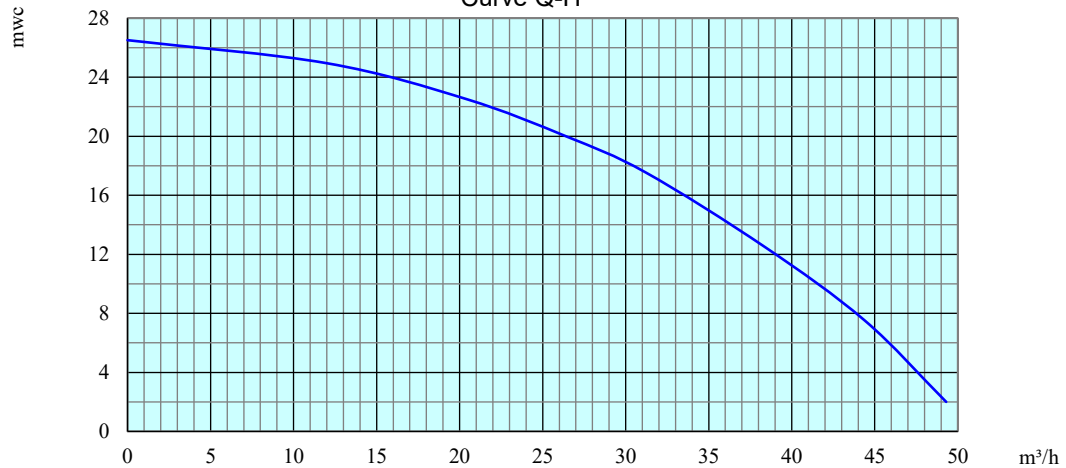

Type	: Tsurumi, KTVE33.7
Applications	: muddy, gritty water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,64 kW at 2.850 rpm
Nominal current	: 7,4 A
Free impeller passage	: 8,5 mm
Weight	: 35,5 kg (without cable)
Height	: 585 mm
Diameter	: Ø 285 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: durable, hardwearing yet light pump compact automatic contractor pump suction cover and pump casing with thick rubber lining
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection , plug 16A 5p male electronic level switch with stainless steel probe