


KTZ-21.5 (KTZ-15H) Submersible drainage pump 2"



Curve Q-H

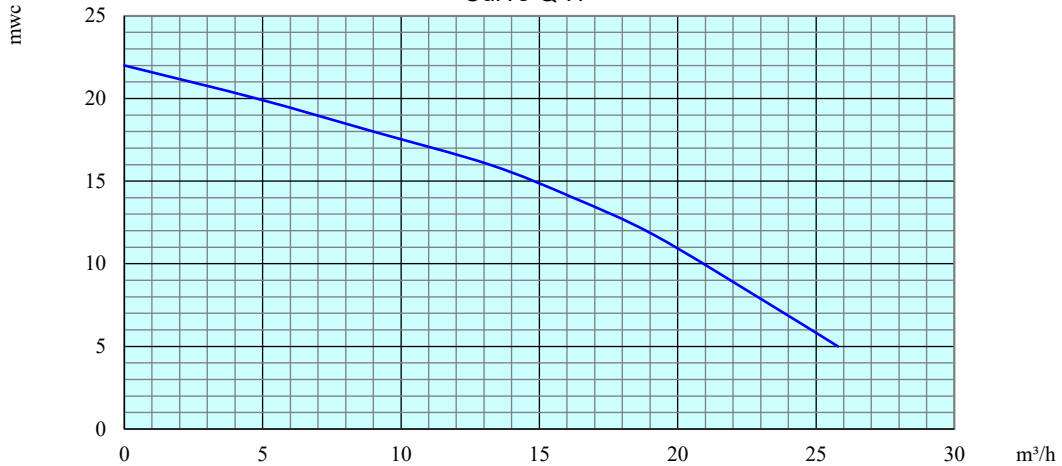

Type	: Tsurumi, KTZ-21.5
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 2,02 kW at 2.850 rpm
Nominal current	: 3,4 A
Free impeller passage	: 8,5 mm
Weight	: 30 kg (without cable)
Height	: 509 mm
Diameter	: Ø 235 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: very durable, hardwearing pump compact contractor pump open impeller in chromium iron
Equipment	: 20 m power cable start – stop switch with thermo-magnetic motor protection plug 16 A 5 p