


KTZ-615 Submersible sludge pump 6"



Q-H Curve

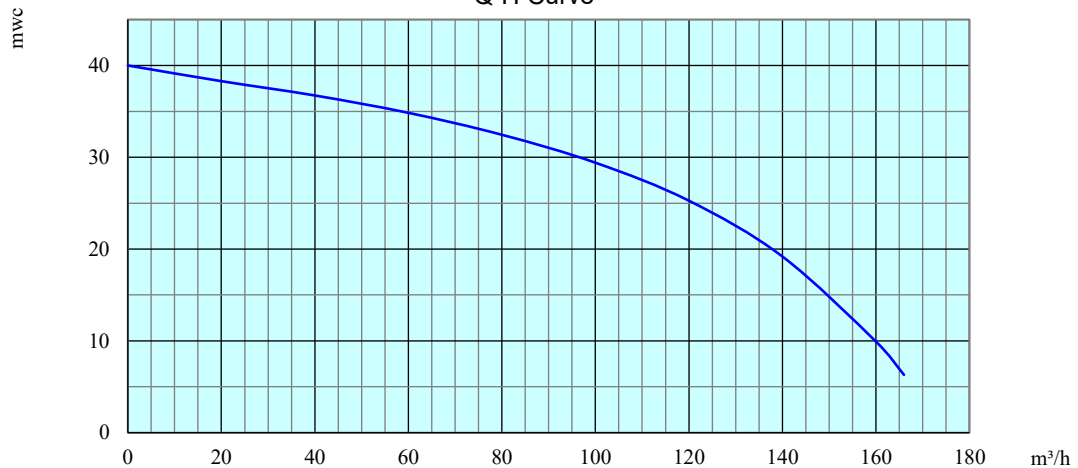

Type	: Tsurumi, KTZ-615
Applications	: muddy, sandy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 17,8 kW at 2.890 rpm
Nominal current	: 28,3 A
Free impeller passage	: 20 mm
Weight	: 146 kg (without cable)
Height	: 1.116 mm
Diameter	: Ø 374 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: very durable, hardwearing pump slim shape, compact contractor pump open impeller in chromium iron
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection plug 32A 5p