


LH-23.0W

Submersible pump 2", high pressure



Curve Q-H

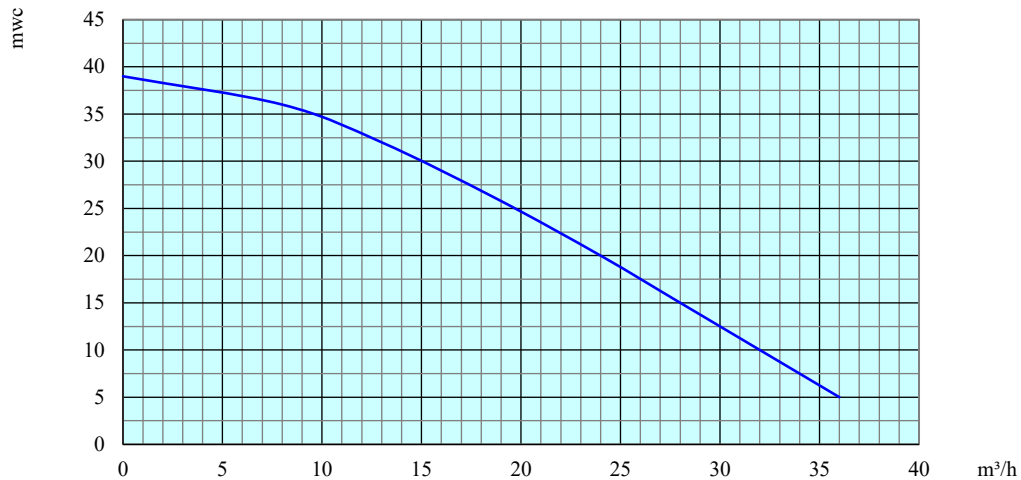

Type	: Tsurumi, LH23.0W
Applications	: clear water, sand carrying water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 3,87 kW at 2.820 rpm
Nominal current	: 6,5 A
Free impeller passage	: 6 mm
Weight	: 46 kg (without cable)
Height	: 630 mm
Diameter	: Ø 185 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: durable, hardwearing compact slim-lined contractor pump
Equipment	: 20 m power cable start- stop switch with thermo-magnetic motor protection, phase swap plug 16A 5p male