


## LH-422

### Submersible pump 4", high pressure



Curve Q-H

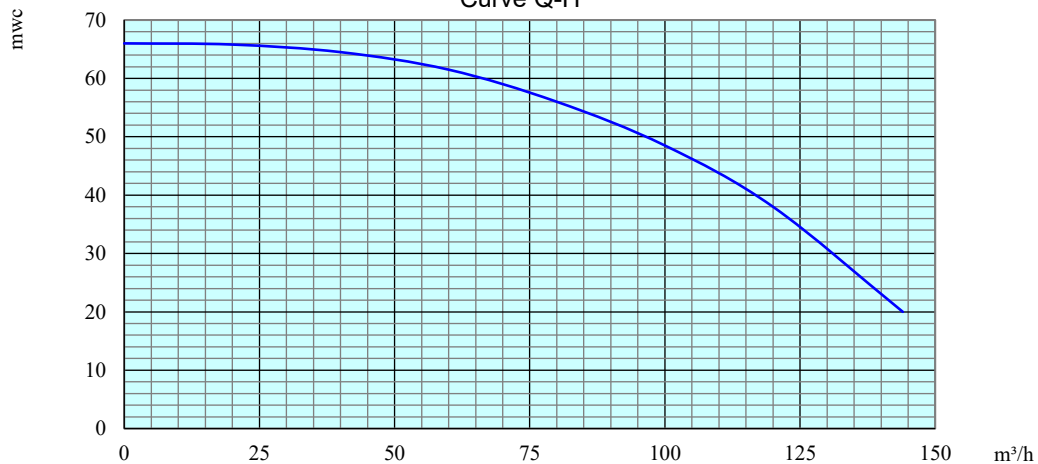

Type	: Tsurumi, LH-422
Applications	: clear water, slightly muddy or gritty water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 26,32 kW at 2.910 rpm
Nominal current	: 40,5 A
Free impeller passage	: 6 mm
Weight	: 350 kg ( without cable, without electrical control panel)
Height	: 1400 mm
Diameter	: Ø 420 mm
Coupling	: discharge side : DIN flange 4" PN10/16
Characteristics	: durable, hardwearing compact, slim-line contractor pump
Equipment	: 20 m power cable control panel suitable for outdoor use, 2 float switches l=20m plug 63A 5p