


MX2336-PU102 EX Explosion proof, submersible pump 4"



Curve Q-H

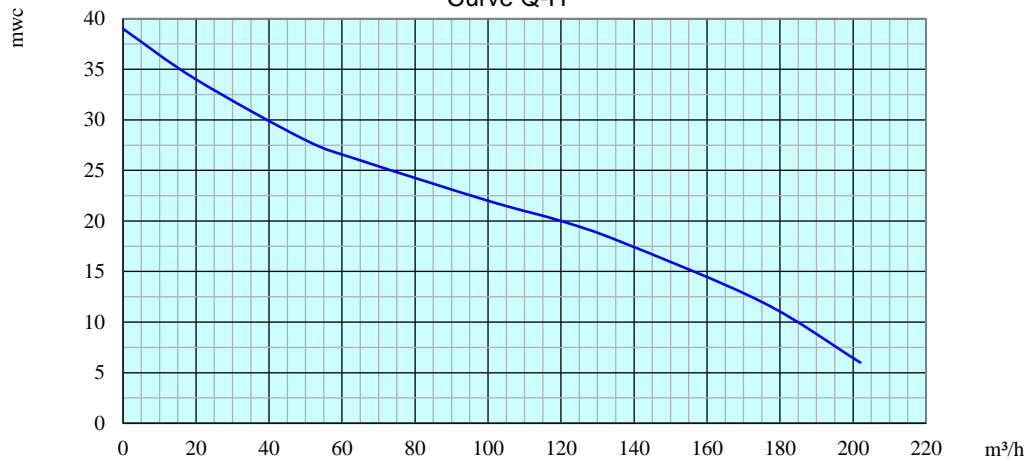

Type	: Homa, MX2336-PU102 EX, Ex II 2G Ex cd IIB T4
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz
Power output	: 22 kW at 2.900 rpm
Nominal current	: 36,9 A
Free impeller passage	: Ø 80 mm
Weight	: 220 kg (pump without cable and control box) – 400 kg complete set
Height	: 1.200 mm
Diameter	: Ø 700 mm
Dimensions	: set : 820 x 820 x 1.500 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: closed single vane impeller in cast iron with brass wearing, seals in Viton pump with mantle cooling (closed cooling system)
Equipment	: 35 m supply cable between pump and control panel, 5 m cable between panel and plug control panel Ex II 2G Ex d [ia] IIB T6, A.T.X. plug 63A 5p Ex II 2G Ex de IIC T6, equipped with 2 explosion proof floats l = 20 meter, Ex II 2G Ex ia IIB T5