


NK3-22L

Submersible contractor pump 3"



Curve Q-H

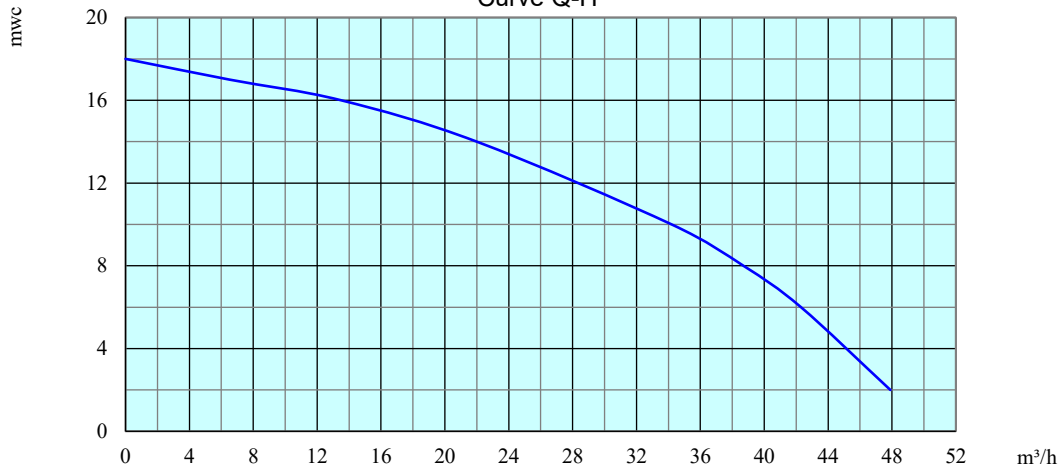

Type	: Tsurumi, NK3-22L
Applications	: muddy, sandy water, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 3,2 kW at 2.890 rpm
Nominal current	: 14,5 A
Free impeller passage	: 6 mm
Weight	: 40 kg (without cable)
Height	: 690 mm
Diameter	: Ø 235 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: very durable, hardwearing pump Single-phase
Equipment	: 20 m power cable start- stop switch with thermal motor protection and electrical plug