


NK4-22

Submersible contractor pump 2"



Curve Q-H

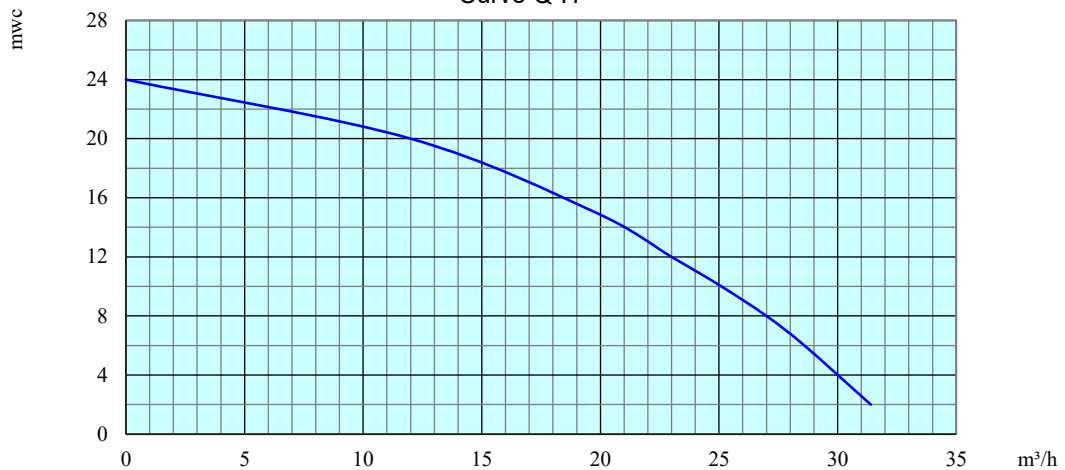

Type	: Tsurumi, NK4-22
Applications	: muddy, sandy water, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 2,92 kW at 2.876 rpm
Nominal current	: 14,6 A
Free impeller passage	: 6 mm
Weight	: 29 kg (without cable)
Height	: 650 mm
Diameter	: Ø 243 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: very durable, hard-wearing pump Single-phase
Equipment	: 20 m power cable start- stop control box with thermal motor protection and electrical plug