


NM32/16 Electrically driven pump 2"



Curve Q-H

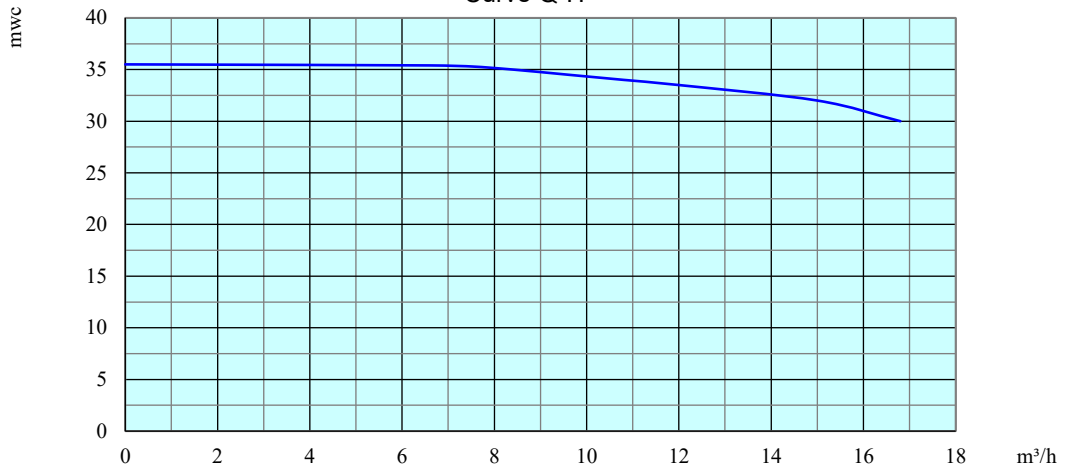

Type	: Calpeda NM32/16A/A
Applications	: clear to slightly contaminated water
Motor	: 3 x 400V, 50 Hz
Power output	: 2,2 kW at 2.900 rpm
Nominal current	: 5,3 A
Free impeller passage	: 3 mm
Weight	: 78 kg
Dimensions	: 650 x 460 x 665 mm
Coupling	: suction and discharge side : DIN flange DN050 PN16
Characteristics	: priming, after a first filling of the pump casing and suction hose compact pumpset
Equipment	: chassis shock absorbers Control box start/stop with thermal-magnetic motor protection 16A5P CEE male plug