


## P6 EX Electrically driven pump 6"



Curve Q-H

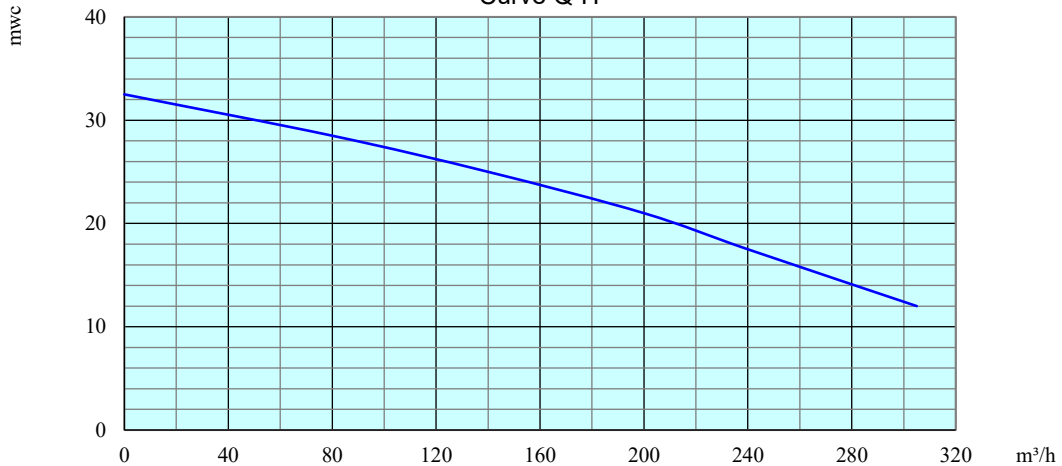

Type	: Pioneer P6, Ex II 3G C T4
Applications	: sewage, mud, contaminated water, ...
Motor	: 3 x 400V, 50 Hz, Ex II 2G EEx d IIB T4
Power output	: 30 kW at 1.475 rpm
Nominal current	: 55 A
Free impeller passage	: 76 mm
Weight	: 1.760 kg
Dimensions	: 2.660 x 1.180 x 1.750 mm
Coupling	: suction and discharge side : Perrot quick couplings 6" male
Characteristics	: self priming (after one manual priming ) thermistor in pump vacuummeter at suction side, manometer at discharge side deaeration valve
Equipment	: forklift pockets, central lifting eye explosion proof control panel with thermo-magnetic motor protection, start/stop, Ex II 2G Ex d IIB T6 Gb, 30m power cable, A.T.X. plug 63A 5p Ex II 2G Ex ed IIC T6 equipped with 2 explosion proof floats l=20m Ex II 1G Ex ia IIC T6